ELEVATION

OUTDOOR TILE

Tile Specification Book

The outdoor collection.

Colors, sizes, laying patterns and published face variation.
Preferred GFTK, LATICRETE and 3 lb EPS installation systems.

Elevation Outdoor Tile / October 2026

Specify with clarity.

One collection. Every listed option.

This book follows the 9 signature collections and 30 broader-palette collections in the Elevation catalog. Each color is pictured. Format tables distinguish pavers, companion tiles, coping and mosaics.

Nominal sizes are selection labels. Calibrated dimensions are listed when supplied; check the delivered caliber, joint allowance, finish and production lot before setting out.

Reading the faces

Kronos manufacturer face boards show published variation within a color. Atlas manufacturer surface studies show installed tile faces in context; they are not complete, numbered face inventories. A printed board is not a guarantee of the face mix in a delivered batch.

Complete unique-face sets and face counts are not verified for every collection. Those gaps are identified in each collection. Request the selected size and current production-lot range board before final approval. No additional faces have been generated, mirrored or invented.

Pattern selection

Use the collection-specific pattern listings with the laying library at the end. Drawings show geometry only. Modular layouts require the exact compatible sizes and a coordinated caliber. Long rectangles follow the product-specific offset limit; companion tile and exterior paver instructions can differ.

Exterior assemblies

A product listing does not approve a complete Colorado assembly. Use the installation systems in the Elevation catalog and obtain project-specific manufacturer acceptance for the selected substrate, exposure, drainage and movement-joint design.

Collection index

The 39 collections in the outdoor catalog.

01	Indiana Limestone	004	21	Travertino	114
02	Pennsylvania Bluestone	009	22	Coralstone	117
03	Appalachian Bluestone	013	23	Axi	119
04	Woods	016	24	Legacy Limestone	124
05	Brave	021	25	Beyond Taj Mahal	129
06	Holystone	027	26	Boost Stone	133
07	Prima Materia	030	27	Legacy Marblestone	137
08	Icon Travertine	035	28	Fray X	142
09	Terrazzo	046	29	Trust	146
10	Dolomite	053	30	Flagstone	150
11	Stone	058	31	Fior Di Bosco	152
12	Quartzite	063	32	Mark	154
13	Ocean Stone	069	33	Seastone	157
14	Tex Wood	074	34	Memory Teak	159
15	Timber Wood	079	35	Dolomia	163
16	Monocromatica	083	36	Luxor	166
17	Cotto	092	37	Agathos	167
18	Block	095	38	Flatiron	168
19	Beyond Dolomite	105	39	Urbe	170
20	Hero	109			

PATTERN LIBRARY

INSTALLATION SYSTEMS

3 LB EPS SPECIFICATION

Indiana Limestone

Stone / Outdoor porcelain

Buff

Paver

Blanco

Paver



Warm Grey

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Buff Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Blanco Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Warm Grey Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles) • Three-size modular layouts

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Indiana Limestone

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/indiana-limestone/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/05/INDIANA-LIMESTONE.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Indiana Limestone

Buff

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 4

Open manufacturer source

Indiana Limestone

Blanco

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 5

Open manufacturer source

Indiana Limestone

Warm Grey

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 6

Open manufacturer source

Pennsylvania Bluestone

Stone / Outdoor porcelain



Full Color

Paver



True Blue

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Full Color Paver	12 x 12 in, 12 x 24 in, 12 x 48 in, 24 x 24 in, 24 x 48 in Companion formats: Block coordinating pieces:8 x 8 in, Block coordinating pieces:8 x 12 in	3/4 inch Cleft-pattern bluestone look; rectified edge
True Blue Paver	12 x 12 in, 12 x 24 in, 12 x 48 in, 24 x 24 in, 24 x 48 in Companion formats: Block coordinating pieces:8 x 8 in, Block coordinating pieces:8 x 12 in	3/4 inch Thermal-pattern bluestone look; rectified edge
Full Color Paver	12 x 24 in, 24 x 24 in, 24 x 36 in	3/4 inch Cleft-pattern porcelain with Heritage irregular/distressed edge
True Blue Paver	12 x 24 in, 24 x 24 in, 24 x 36 in	3/4 inch Thermal-pattern porcelain with Heritage irregular/distressed edge

Laying patterns

Stack bond • Rectangle offset:maximum1/3 • A modular:1 x 24 x 24 +1 x 12 x 24 +1 x 12 x 12 • B modular:1 x 24 x 24 +2 x 12 x 24 +2 x 12 x 12 • C modular:2 x 24 x 24 +3 x 12 x 24 +4 x 12 x 12 • D modular:1 x 24 x 48 +2 x 24 x 24 +2 x 12 x 24 • Five-piece Heritage modular layout

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format); Heritage Edge distressed perimeter; Five-piece Heritage module:2 x 12 x 24 +1 x 24 x 24 +2 x 24 x 36

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Pennsylvania Bluestone

Specification notes / continued

Order and engineered assembly must confirm use, availability and specialty compatibility.

8 x 8 and 8 x 12 are coordinating Block formats; 12 x 48 verified by 2026 organizer despite one family PDF chart labeling typo.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Thermal and cleft refer to porcelain surface appearances; neither means the porcelain was processed like natural thermal/cleft stone.

Small8 x 8 and8 x 12 formats belong to coordinating Block program, not standard rectified large-format range.

2026 family PDF duplicates24 x 48 chart header forUS7922/US7923; August2026 organizer and2026 Pools both verify those SKUs as12 x 48.

24 x 36 in is verified as part of the Heritage modular pack, not the standard rectified range.

Five-piece composition:two12 x 24 in pieces,one24 x 24 in piece,two24 x 36 in pieces.

Confirm selected shade, pack availability, edges and installation details before ordering.

Heritage24 x 36 is part of the dedicated modular pack;not a regular standalone rectified format.

Confirm shade-specific pack supply and dimensions before order;family PDF explicitly illustrates FullColorHeritage and describes Heritage collection-wide.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/pennsylvania/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/07/KRONOS_Pennsylvania_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Pennsylvania Bluestone

Full Color / Cleft

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 18

Open manufacturer source

Pennsylvania Bluestone

True Blue / Thermal

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 19

Open manufacturer source

Appalachian Bluestone

Stone / Outdoor porcelain



Select

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Select Paver	24 x 24 in, 24 x 48 in Calibrated / supplier: 23 5/8 x 23 5/8 in; 23 5/8 x 47 1/4 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in; 24 x 36 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/bluestone-select/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Appalachian Bluestone

Select / 24 x 48

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 24

Open manufacturer source

Appalachian Bluestone

Select / 24 x 24

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 24

Open manufacturer source

Woods

Wood / Outdoor porcelain



Pinewood

Paver



Oakwood

Paver



Driftwood

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Pinewood Paver	12 x 48 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Oakwood Paver	12 x 48 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Driftwood Paver	12 x 48 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Woods

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/woods/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/04/26Y0338_KRONOS_Woods_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Woods

Driftwood

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 45

Open manufacturer source

Woods

Pinewood

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 46

Open manufacturer source

Woods

Oakwood

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 47

Open manufacturer source

Brave

Stone / Outdoor porcelain



Gypsum

Paver



Pearl

Paver



Gray

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Gypsum Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Pearl Paver	24 x 24 in, 24 x 48 in Calibrated / supplier: 23 5/8 x 23 5/8 in; 23 5/8 x 47 1/4 in	20 mm Sensitech textured outdoor surface; rectified
Gray Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in; 24 x 36 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Brave

Specification notes / continued

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/brave-gypsum/
https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/
https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf
https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/brave-pearl/

Brave

Gray

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 28

Open manufacturer source

Brave

Gypsum

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 28

Open manufacturer source

Brave

Pearl / 24 x 48

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 29

Open manufacturer source

Brave

Pearl / 24 x 24

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 29

Open manufacturer source

Holystone

Stone / Outdoor porcelain



Beige

Paver




Dark

Paver



Grey

Paver

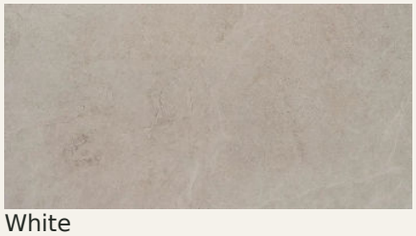

White

Paver + Coping



Teak Grey

Mosaic



Teak White

Mosaic



Teak Dark

Mosaic



Teak Beige

Mosaic

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Beige Paver	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
Dark Paver	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
Grey Paver	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
White Paver	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
Holystone Beige Paver	12 x 24 in Calibrated / supplier: 12x24	0.9 cm Matte
Holystone White Paver	12 x 24 in Calibrated / supplier: 12x24	0.9 cm Matte
Holystone Grey Paver	12 x 24 in Calibrated / supplier: 12x24	0.9 cm Matte
White Coping	13 x 24 in Calibrated / supplier: 13" x 24"	2cm Matte
Holystone Teak Grey Mosaic	12 x 48 in Calibrated / supplier: 12x48	0.9cm Matte
Holystone Teak White Mosaic	12 x 48 in Calibrated / supplier: 12x48	0.9cm Matte
Holystone Teak Dark Mosaic	12 x 48 in Calibrated / supplier: 12x48	0.9cm Matte
Holystone Teak Beige Mosaic	12 x 48 in Calibrated / supplier: 12x48	0.9cm Matte

Laying patterns

Straight lay • Staggered layout; confirm allowable offset • Mosaic sheet layout

Coordinating pieces

Components: Bullnose coping

Specification notes

Official sheet lists exterior use and frost resistance; confirm mounting, adhesive, grout and immersion approval for the project.

Thin tile is bonded to a suitable exterior substrate. It is not treated as a loose-set or pedestal paver. Verify wet traction and finish for the intended walking surface.

Holystone

Specification notes / continued

Source documents contain conflicting material labels for this specialty piece. Confirm the physical material, matching color and fabrication specification before ordering.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.

Product references

https://www.keystonetile.com/product/24x48-holystone-beige-porcelain-pavers/

https://www.keystonetile.com/product/24x48-holystone-dark-porcelain-pavers/

https://www.keystonetile.com/product/24x48-holystone-grey-porcelain-pavers/

https://www.keystonetile.com/product/24x48-holystone-white-porcelain-pavers/

Prima Materia

Concrete / Outdoor porcelain



Cemento

Paver



Cenere

Paver



Sandalo

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Cemento Paver	24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Cenere Paver	24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Sandalo Paver	24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Prima Materia

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/prima-materia/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2025/01/KUSA-PrimaMateria-2024.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Prima Materia

Cemento

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 31

Open manufacturer source

Prima Materia

Cenere

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 32

Open manufacturer source

Prima Materia

Sandalo

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 33

Open manufacturer source

Icon Travertine

Travertine / Outdoor porcelain



Tivoli’s Avorio

Paver



Tivoli’s Crema

Paver



Tivoli’s Walnut

Paver



Andes Silver

Paver



Andes Shell

Paver



Andes Cappuccino

Paver



Pearl

Paver



River

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Tivoli’s Avorio Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Tivoli cross cut travertine-look textured porcelain; rectified edge
Tivoli’s Crema Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Tivoli cross cut travertine-look textured porcelain; rectified edge
Tivoli’s Walnut Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Tivoli cross cut travertine-look textured porcelain; rectified edge
Andes Silver Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Andes cross cut travertine-look textured porcelain; rectified edge
Andes Shell Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Andes cross cut travertine-look textured porcelain; rectified edge
Andes Cappuccino Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Andes cross cut travertine-look textured porcelain; rectified edge
Pearl Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Italian vein cut travertine-look textured porcelain; rectified edge
River Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Italian vein cut travertine-look textured porcelain; rectified edge

Laying patterns

Stack bond • Rectangle offset:maximum1/3 • A modular:1 x 24 x 24 +1 x 12 x 24 +1 x 12 x 12 • B modular:1 x 24 x 24 +2 x 12 x 24 +2 x 12 x 12 • C modular:2 x 24 x 24 +3 x 12 x 24 +4 x 12 x 12

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: Bullnose coping:12 x 24 in nominal; Double bevel coping:12 x 24 in nominal; Blind grid:6 x 24,6 x 12,6 x 6 in; Blind grid corner:6 x 6 x 12 in; L-shaped profiles:12 x 24 in with2in drop,confirm fabrication

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Icon Travertine

Specification notes / continued

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

All four listed sizes are independently verified for this exact color by individual SKUs in2026 Pools and August2026 organizer.

No24 x 36 Heritage modular pack,8 x 8 or8 x 12 standard formats are verified for Icon Travertine.

A/B/C are layout diagrams assembled from individual formats; they are not proof of a prepacked modular SKU.

Bullnose/double bevel radius can expose porcelain body color; do not depict full printed-color wrap over rounded edges.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/icon-travertine/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2025/01/Icon-Travertine-2024.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Icon Travertine

Tivoli’s Avorio

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 10

Open manufacturer source

Icon Travertine

Tivoli’s Crema

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 11

Open manufacturer source

Icon Travertine

Tivoli’s Walnut

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 12

Open manufacturer source

Icon Travertine

Andes Silver

Manufacturer face board




Kronos PoPa 2.0 Organizer, August 2026 / PDF page 13

Open manufacturer source

Icon Travertine

Andes Shell

Manufacturer face board

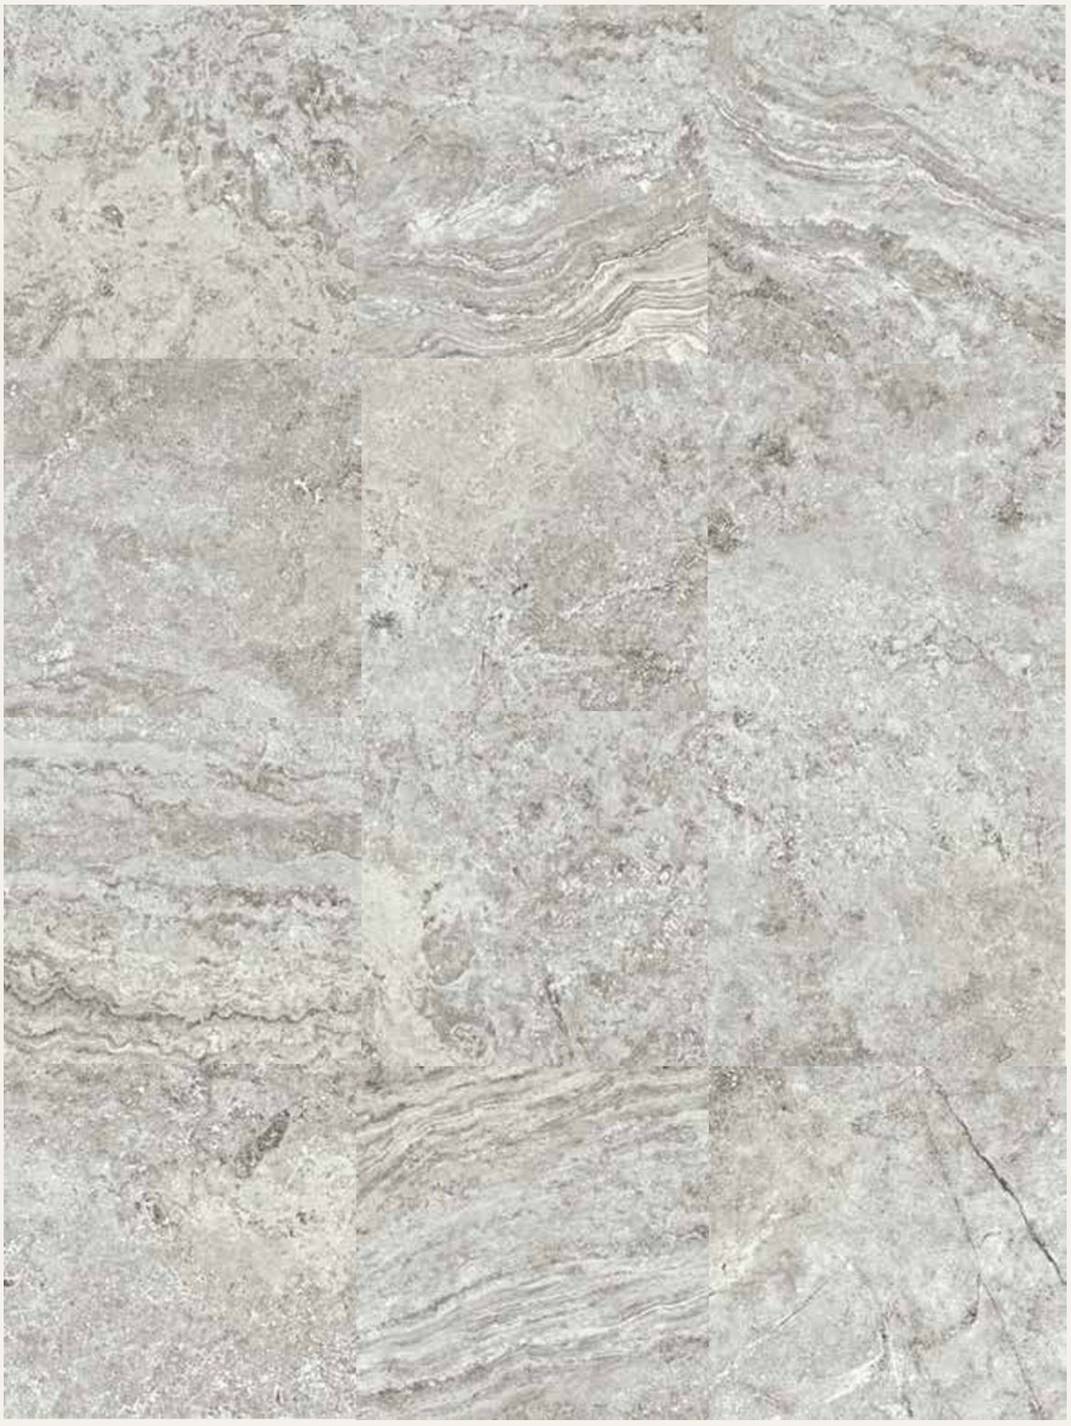

Kronos PoPa 2.0 Organizer, August 2026 / PDF page 14

Open manufacturer source

Icon Travertine

Andes Cappuccino

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 15

Open manufacturer source

Icon Travertine

Pearl

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 16

Open manufacturer source

Icon Travertine

River

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 17

Open manufacturer source

Terrazzo

Terrazzo / Outdoor porcelain




White Black

Paver



Grey Black

Paver



Charcoal

Paver



Cool White

Paver



Cool Grey

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Black Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Grey Black Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Charcoal Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Cool White Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Cool Grey Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Terrazzo

Specification notes / continued

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/terrazzo/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Terrazzo

White Black

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 40

Open manufacturer source

Terrazzo

Grey Black

Manufacturer face board




Kronos PoPa 2.0 Organizer, August 2026 / PDF page 41

Open manufacturer source

Terrazzo

Charcoal

Manufacturer face board

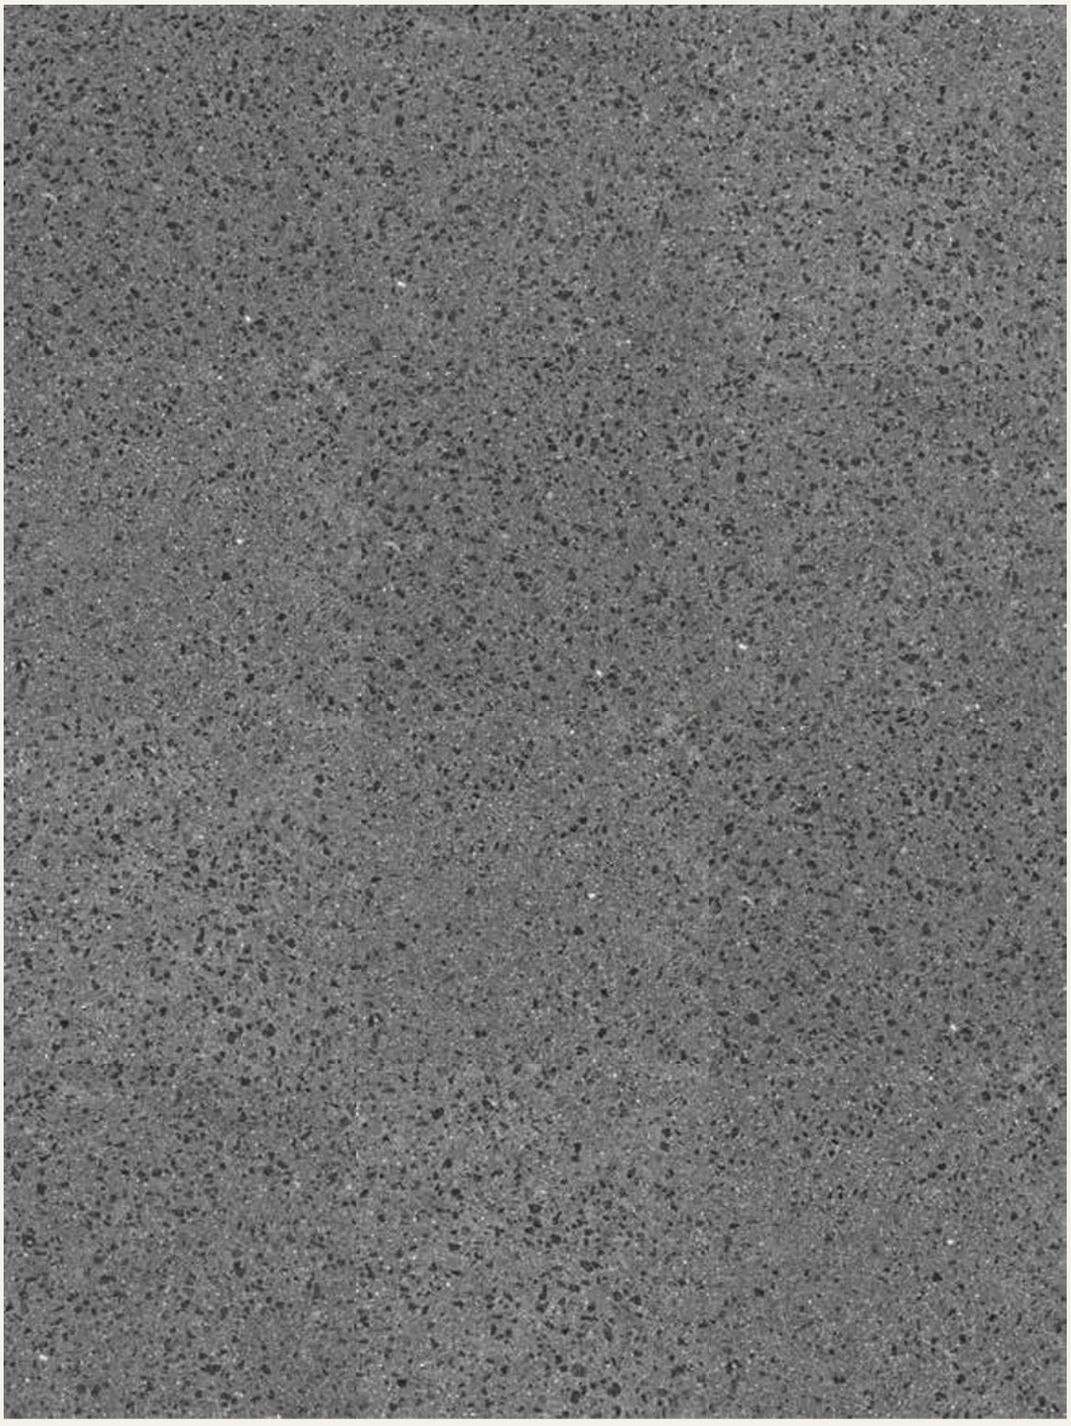

Kronos PoPa 2.0 Organizer, August 2026 / PDF page 42

Open manufacturer source

Terrazzo

Cool White

Manufacturer face board




Kronos PoPa 2.0 Organizer, August 2026 / PDF page 43

Open manufacturer source

Terrazzo

Cool Grey

Manufacturer face board

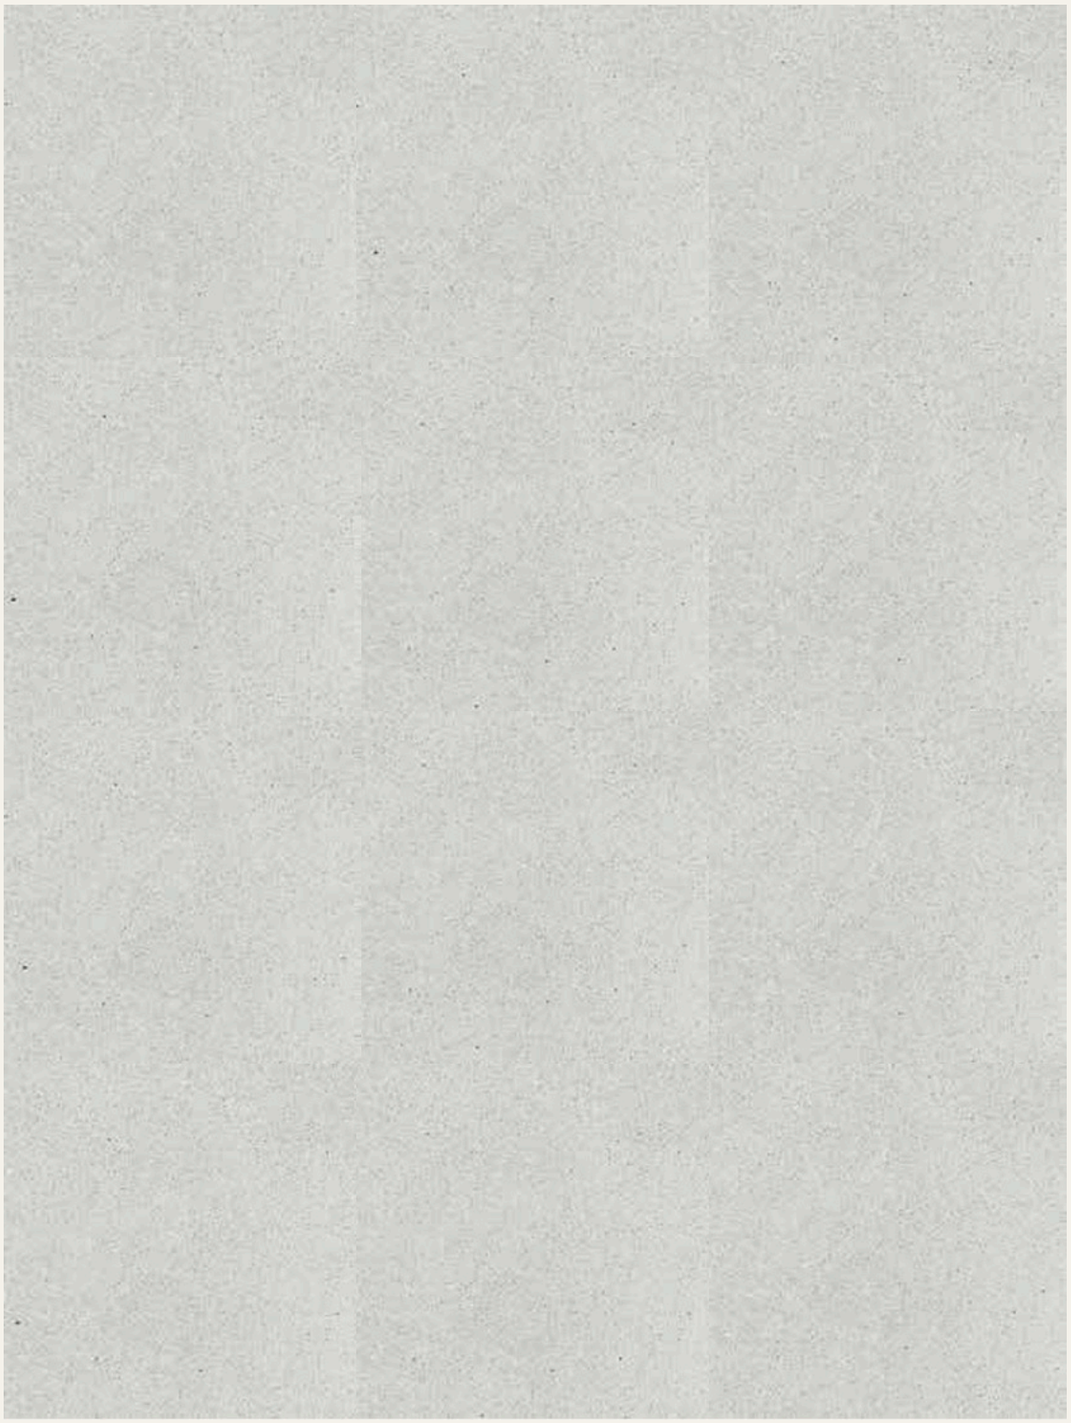

Kronos PoPa 2.0 Organizer, August 2026 / PDF page 44

Open manufacturer source

Dolomite

Stone / Outdoor porcelain

Dove

Paver

Wheat

Paver



Steel

Paver

Heritage set / shown in Dove

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Dove Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Wheat Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Steel Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Dove / Wheat / Steel Paver	12 x 24 in, 24 x 24 in, 24 x 36 in	3/4 inch Heritage irregular/distressed edge

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles) • Three-size modular layouts • Five-piece modular Heritage pattern

Dolomite

Specification notes / continued

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format); Heritage Edge distressed perimeter; Heritage modular pack:two 12 x 24 + one 24 x 24 + two 24 x 36 in

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

Current 2026 catalog identifies light shade as Dove; page introduction still refers to White.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

24 x 36 in is verified as part of the Heritage modular pack, not the standard rectified range.

Five-piece composition:two 12 x 24 in pieces,one 24 x 24 in piece,two 24 x 36 in pieces.

Confirm selected shade, pack availability, edges and installation details before ordering.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/dolomite-2/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/05/DOLOMITE.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

Dolomite

Dove

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 7

Open manufacturer source

Dolomite

Wheat

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 8

Open manufacturer source

Dolomite

Steel

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 9

Open manufacturer source

Stone

Stone / Outdoor porcelain



Moonstone

Paver



Creamstone

Paver



Multicolor

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Moonstone Paver	12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Creamstone Paver	12 x 12 in, 12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Multicolor Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles) • Three-size modular layouts

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Stone

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/stone/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Stone

Moonstone

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 20

Open manufacturer source

Stone

Creamstone

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 21

Open manufacturer source

Stone

Multicolor

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 22

Open manufacturer source

Quartzite

Stone / Outdoor porcelain



Crystal White

Paver



Sandy Island

Paver



Laguna

Paver



Cloud

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Crystal White Paver	12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Sandy Island Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Laguna Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Cloud Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Quartzite

Specification notes / continued

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/quartzite/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Quartzite

Crystal White

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 23

Open manufacturer source

Quartzite

Sandy Island

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 24

Open manufacturer source

Quartzite

Laguna

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 25

Open manufacturer source

Quartzite

Cloud

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 26

Open manufacturer source

Ocean Stone

Stone / Outdoor porcelain



White Cool

Paver



Black

Paver



Tan

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Cool Paver	12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Black Paver	12 x 24 in, 24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges
Tan Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Ocean Stone

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/ocean-stone/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Ocean Stone

White Cool

Manufacturer face board




Kronos PoPa 2.0 Organizer, August 2026 / PDF page 27

Open manufacturer source

Ocean Stone

Black

Manufacturer face board

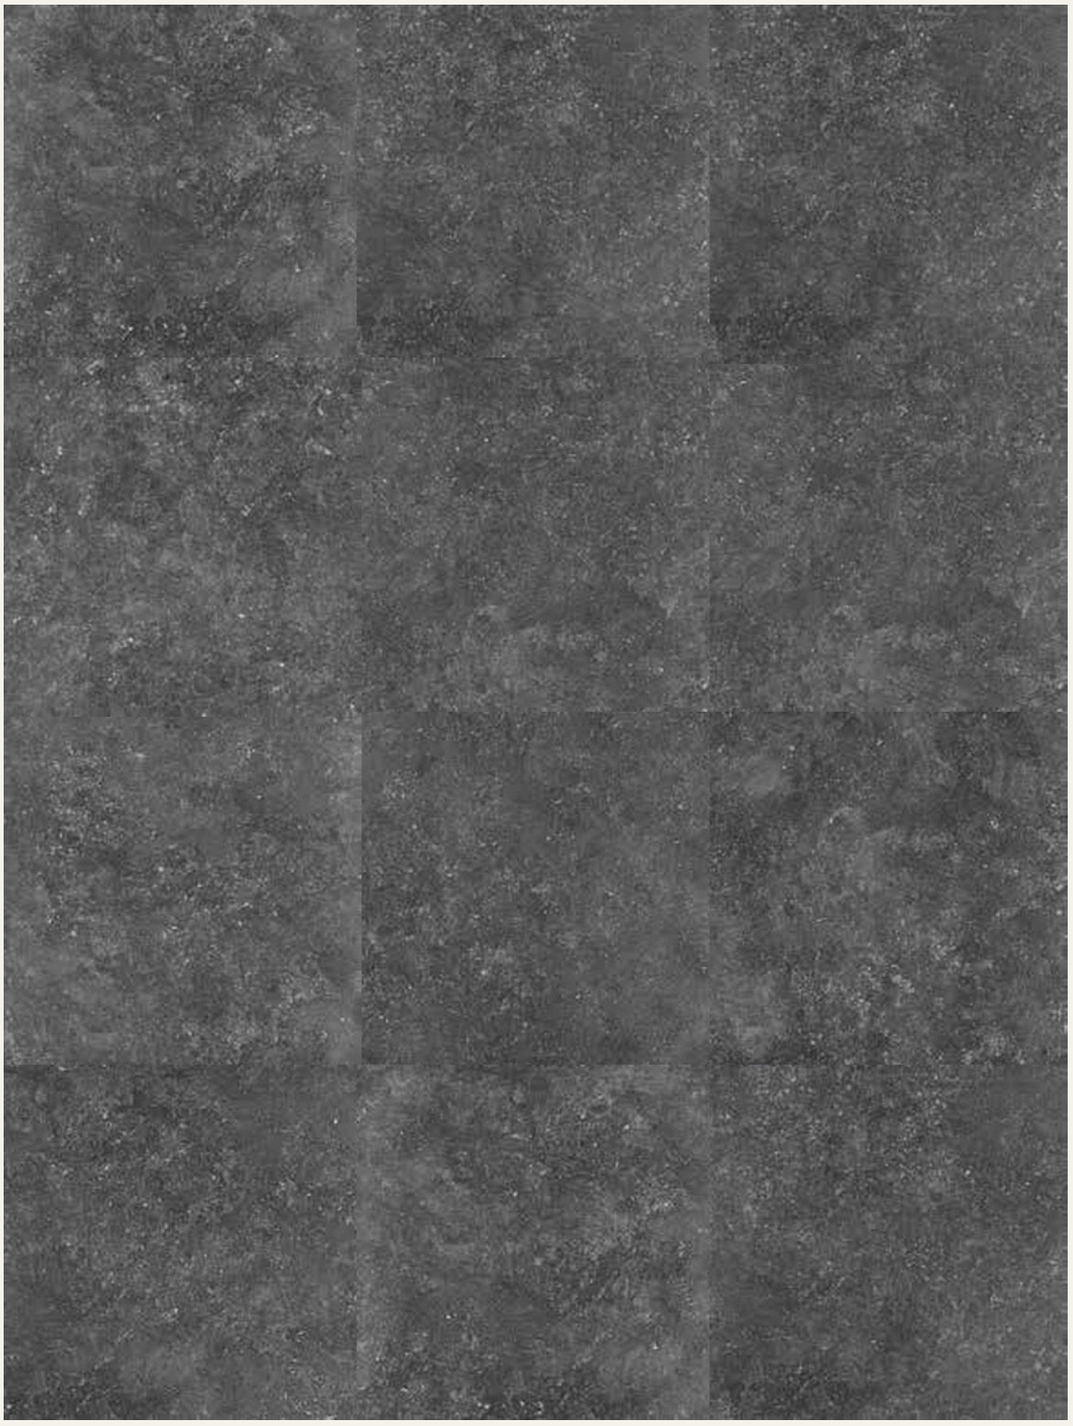


Kronos PoPa 2.0 Organizer, August 2026 / PDF page 28

Open manufacturer source

Ocean Stone

Tan

Manufacturer face board

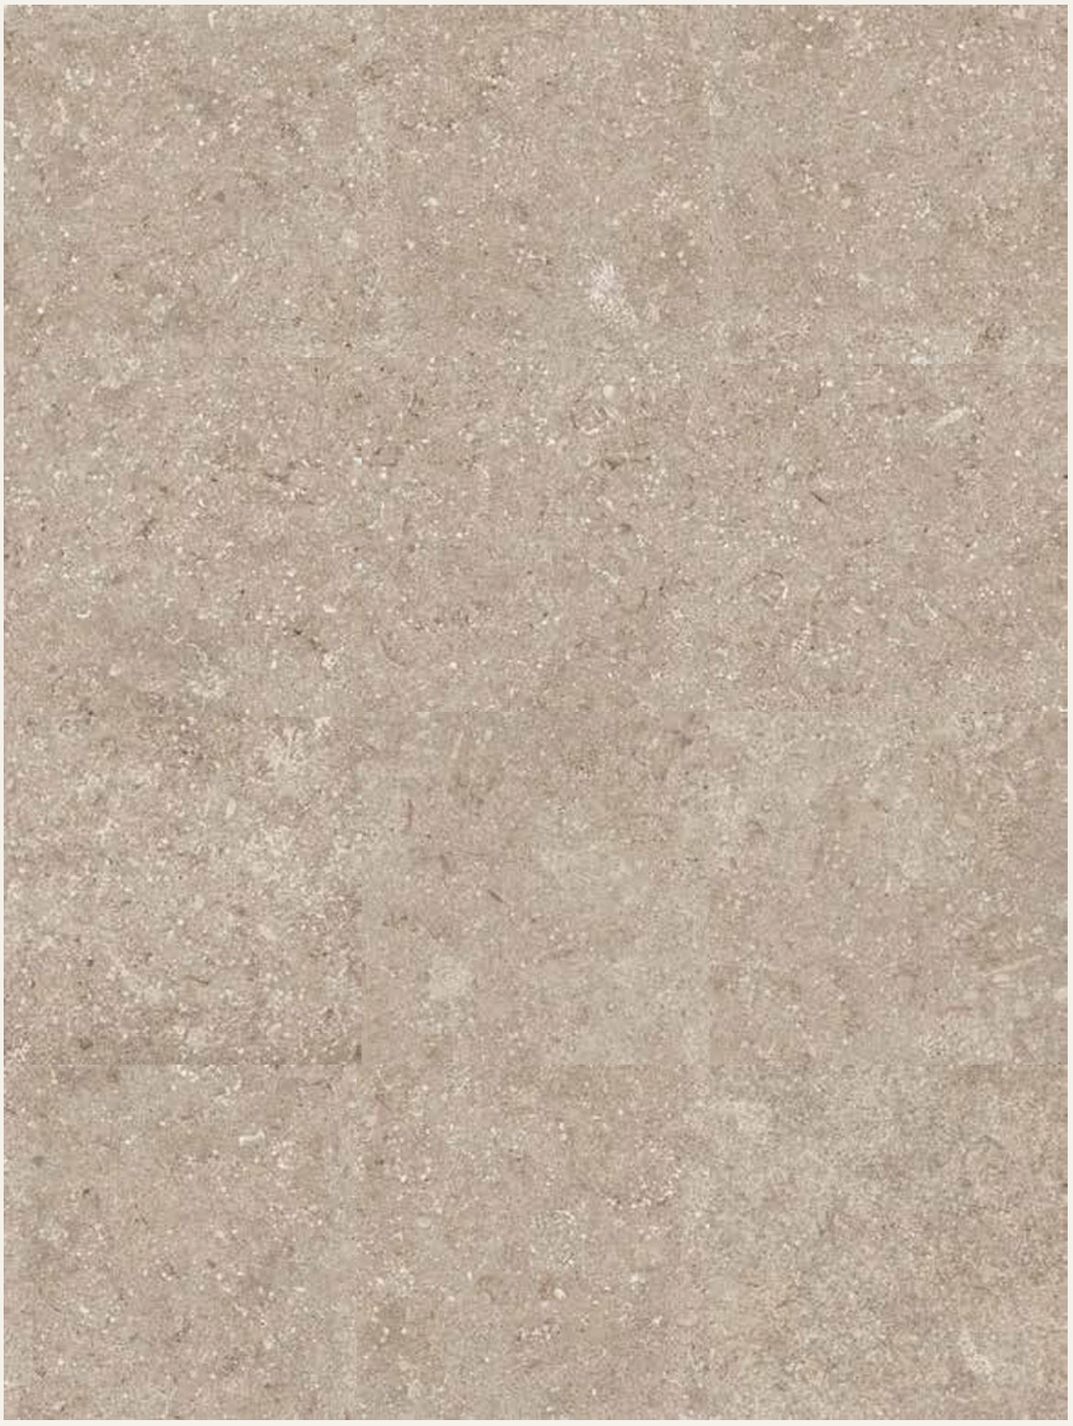

Kronos PoPa 2.0 Organizer, August 2026 / PDF page 29

Open manufacturer source

Tex Wood

Wood / Outdoor porcelain



Grey

Paver



Brown

Paver



Ivory

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Grey Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Brown Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Ivory Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Straight decking grain • Quarter-turn checkerboard

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Tex Wood

Specification notes / continued

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/tex-wood/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/porcelain-ventilated-facades/

https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Tex Wood

Grey

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 48

Open manufacturer source

Tex Wood

Brown

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 49

Open manufacturer source

Tex Wood

Ivory

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 50

Open manufacturer source

Timber Wood

Wood / Outdoor porcelain



Teak

Paver



Ipé

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Teak Paver	24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Ipé Paver	24 x 24 in, 24 x 48 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Timber Wood

Specification notes / continued

Product references

https://kronos-usa.com/collections/timber-wood/
https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf
https://kronos-usa.com/porcelain-ventilated-facades/
https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Timber Wood

Teak

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 51

Open manufacturer source

Timber Wood

Ipé

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 52

Open manufacturer source


Monocromatica

Concrete / Outdoor porcelain




Bone

Paver




Basalt

Paver



Ash

Paver



Sand

Paver



Cognac

Paver



Leather

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Bone Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Basalt Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Ash Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Sand Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Cognac Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges
Leather Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

Leather is listed in August 2026 organizer but not the web color selector; confirm current availability.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Monocromatica

Specification notes / continued

Product references

https://kronos-usa.com/collections/monocromatica/
https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf
https://kronos-usa.com/porcelain-ventilated-facades/
https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Monocromatica

Bone

Manufacturer face board




Kronos PoPa 2.0 Organizer, August 2026 / PDF page 34

Open manufacturer source

Monocromatica

Ash

Manufacturer face board

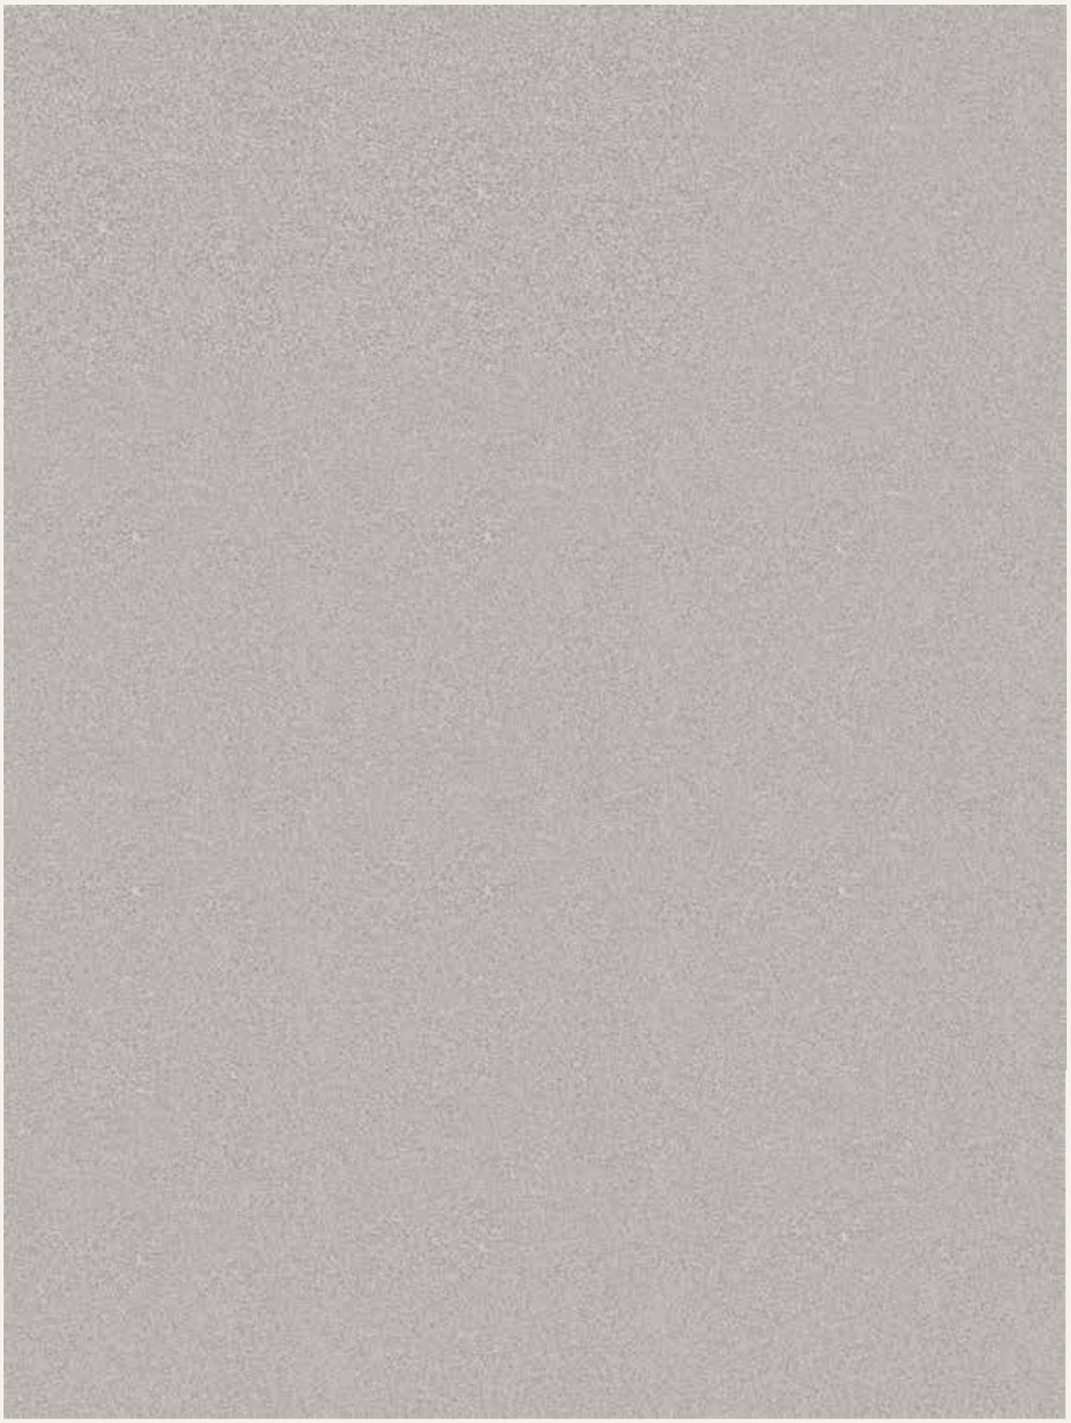


Kronos PoPa 2.0 Organizer, August 2026 / PDF page 35

Open manufacturer source

Monocromatica

Basalt

Manufacturer face board

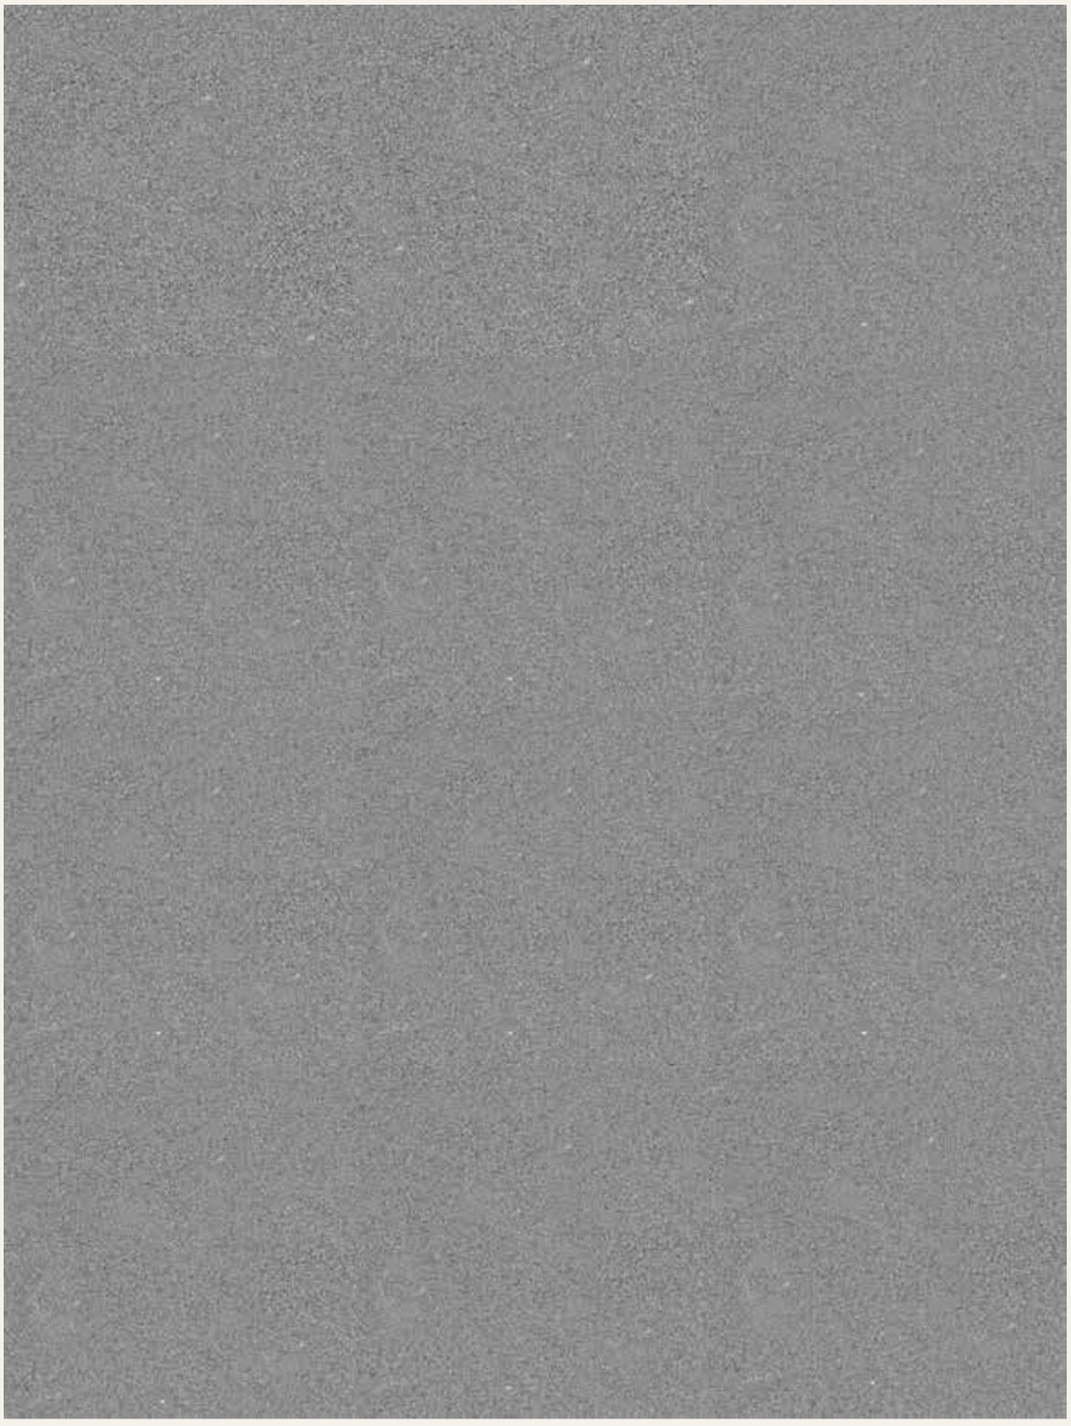


Kronos PoPa 2.0 Organizer, August 2026 / PDF page 36

Open manufacturer source

Monocromatica

Sand

Manufacturer face board

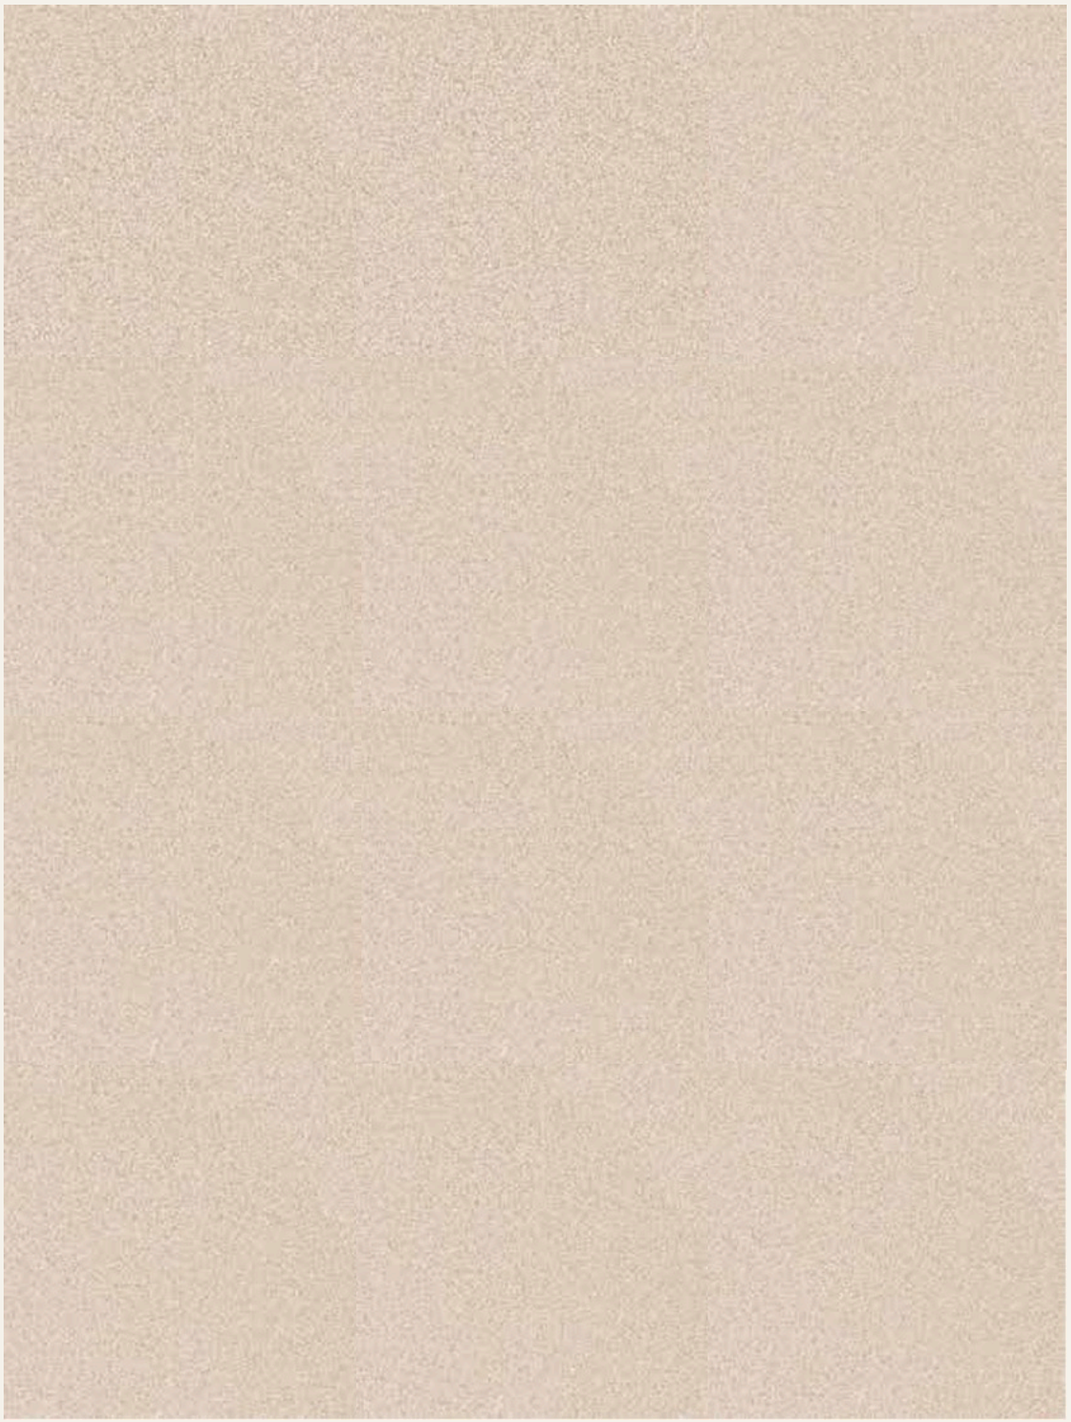


Kronos PoPa 2.0 Organizer, August 2026 / PDF page 37

Open manufacturer source

Monocromatica

Cognac

Manufacturer face board

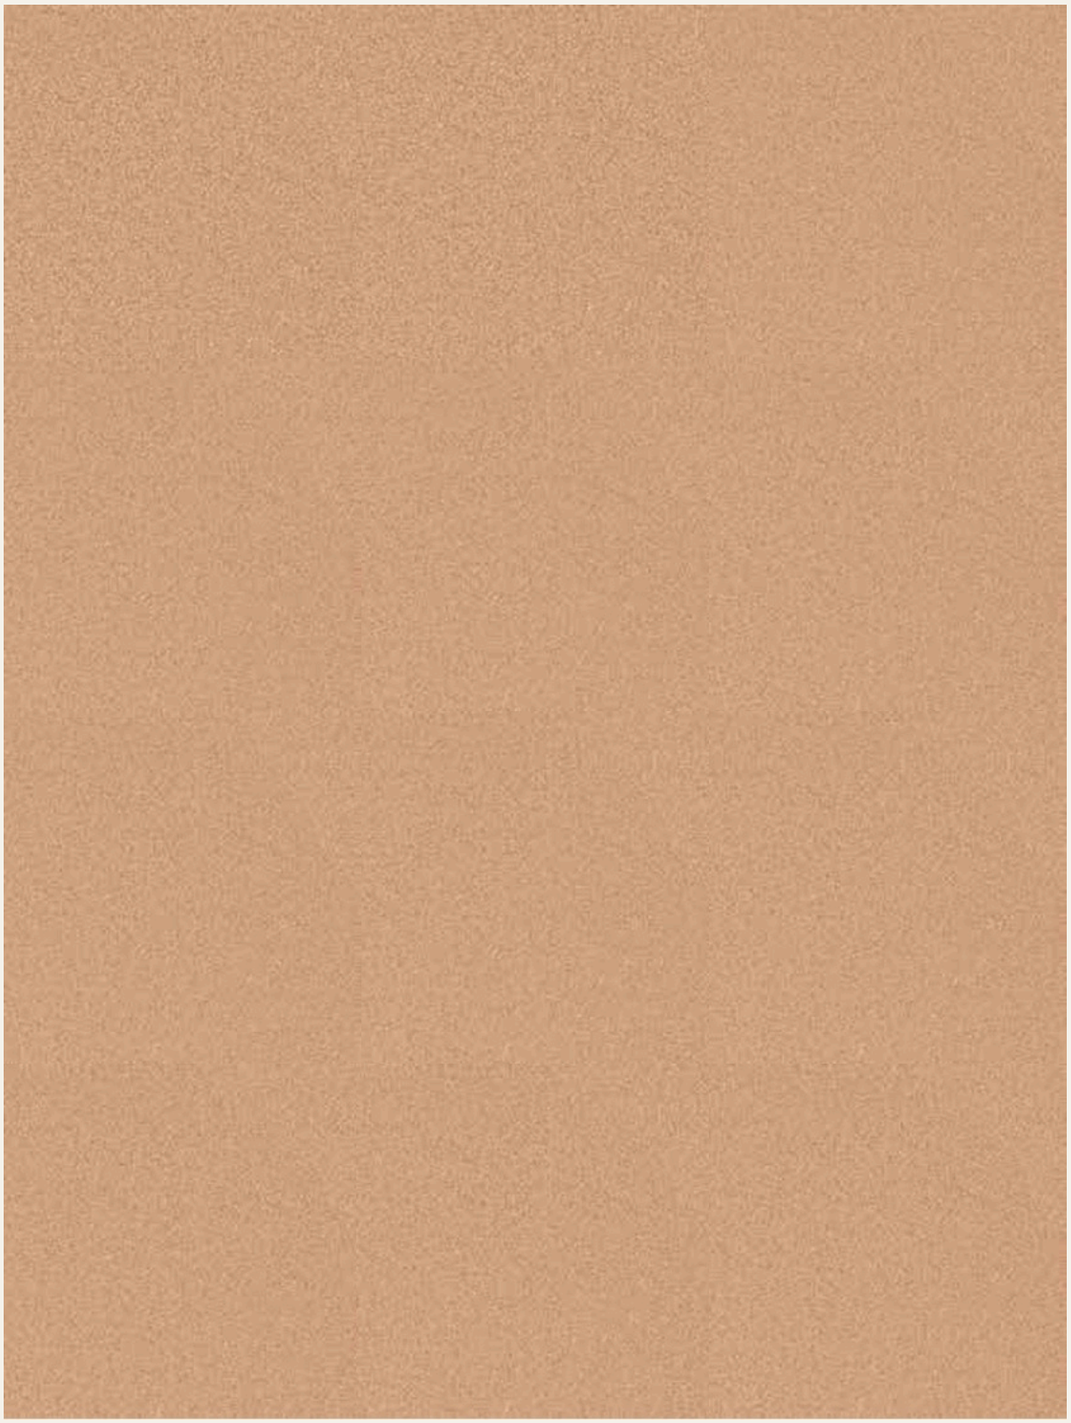


Kronos PoPa 2.0 Organizer, August 2026 / PDF page 38

Open manufacturer source

Monocromatica

Leather

Manufacturer face board

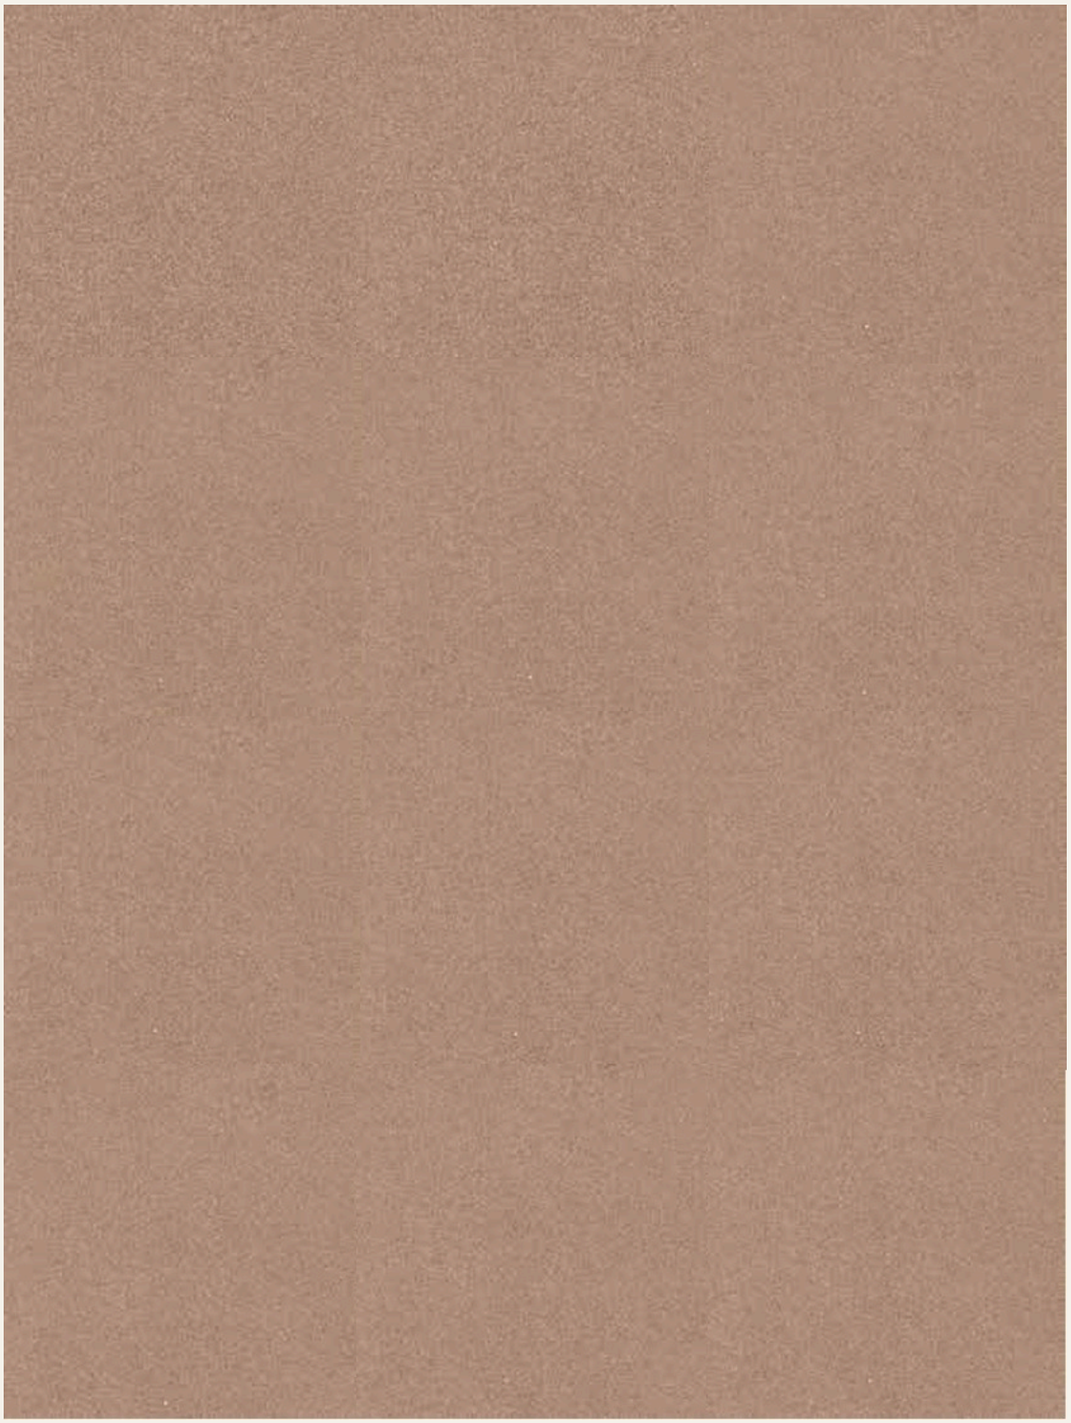

Kronos PoPa 2.0 Organizer, August 2026 / PDF page 39

Open manufacturer source

Cotto

Terracotta / Outdoor porcelain



Cotto

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Cotto Paver	12 x 24 in, 24 x 24 in	3/4 inch Textured exterior porcelain; rectified edges

Laying patterns

Stack bond • Running bond (maximum 1/3 offset for large rectangles)

Coordinating pieces

Components: Made-to-order L-shaped coping; Left/right corners; Full bullnose; Double bevel; Blind drain grids (confirm color and format)

Specialty formats: L-shaped coping:12 x 24 in,2 in drop; Left/right L corner closures:12 x 24 in,2 in drop; 45° L corner cut:12 x 24 in,2 in drop; Full bullnose/double bevel:12 x 24 in; Blind grid:6 x 24,6 x 12 or 6 x 6 in; Blind grid corner:6 x 6 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Exterior walls require a suitable adhered assembly or engineered concealed kerf anchoring; confirm selected format, dead load, wind load and attachment details.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/cotto/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

Cotto

Specification notes / continued

https://kronos-usa.com/porcelain-ventilated-facades/
https://kronos-usa.com/src/uploads/sites/2/2026/08/Ventilated-facades.pdf

Cotto

Cotto

Manufacturer face board



Kronos PoPa 2.0 Organizer, August 2026 / PDF page 30

Open manufacturer source

Block

Cobblestone / Outdoor porcelain



True Blue

Paver



Full Color

Paver



Porfido

Paver



Cotto

Paver



Bruges

Paver



Gent

Paver



Namur

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
True Blue Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Full Color Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Porfido Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Cotto Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Bruges Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Gent Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format
Namur Paver	8 x 8 in, 8 x 12 in	3/4 inch (18 mm) Komfort textured anti-slip porcelain; compact cobblestone format

Laying patterns

Stack bond • Running bond • Herringbone • Basket weave • Mixed 8 x 8 + 8 x 12 modular

Coordinating pieces

Components: 2in-drop L-shaped pieces; L-shaped corner pieces; Bullnose pieces; Corner bullnose pieces; Custom drainage groove

Specialty formats: L-shaped:8 x 8 or8 x 12 in,2in drop; L-shaped corner:8 x 8 or8 x 12 in,2in drop; Bullnose:8 x 8 or8 x 12 in; Corner bullnose:8 x 8 or8 x 12 in

Specification notes

Nominal sizes shown. Actual rectified dimensions differ; confirm dimensions before layout.

Color-specific formats are listed in variants.

Order and engineered assembly must confirm use, availability and specialty compatibility.

2026 organizer uses 60 x 60, 60 x 120, 30 x 60, 30 x 30 and 30 x 120 cm rectified formats; nominal inch labels are rounded. Confirm supplied calibrated measurements.

Block

Specification notes / continued

Small Block formats are not automatically approved for pedestal decks; heavy-vehicle use requires bonded installation on properly engineered concrete.

2026 Block PDF verifies all four specialty shapes in both8 x 8 and8 x 12 formats.

Bonded concrete installation is required for heavy-duty vehicle applications; do not imply generic pedestal support approval.

Face range

Published Kronos boards follow. These illustrate the manufacturer range; unique-face counts, size-specific graphics and delivered lot mix require confirmation. Heritage edge and companion finishes may differ.

Product references

https://kronos-usa.com/collections/block/

https://kronos-usa.com/src/uploads/sites/2/2026/08/PoPa_Organizer_2026.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/06/BLOCK-1.pdf

https://kronos-usa.com/src/uploads/sites/2/2026/03/POOLS.pdf

Block

Full Color

Manufacturer face board




Kronos Block, June 2026 / PDF page 7

Open manufacturer source

Block

True Blue

Manufacturer face board

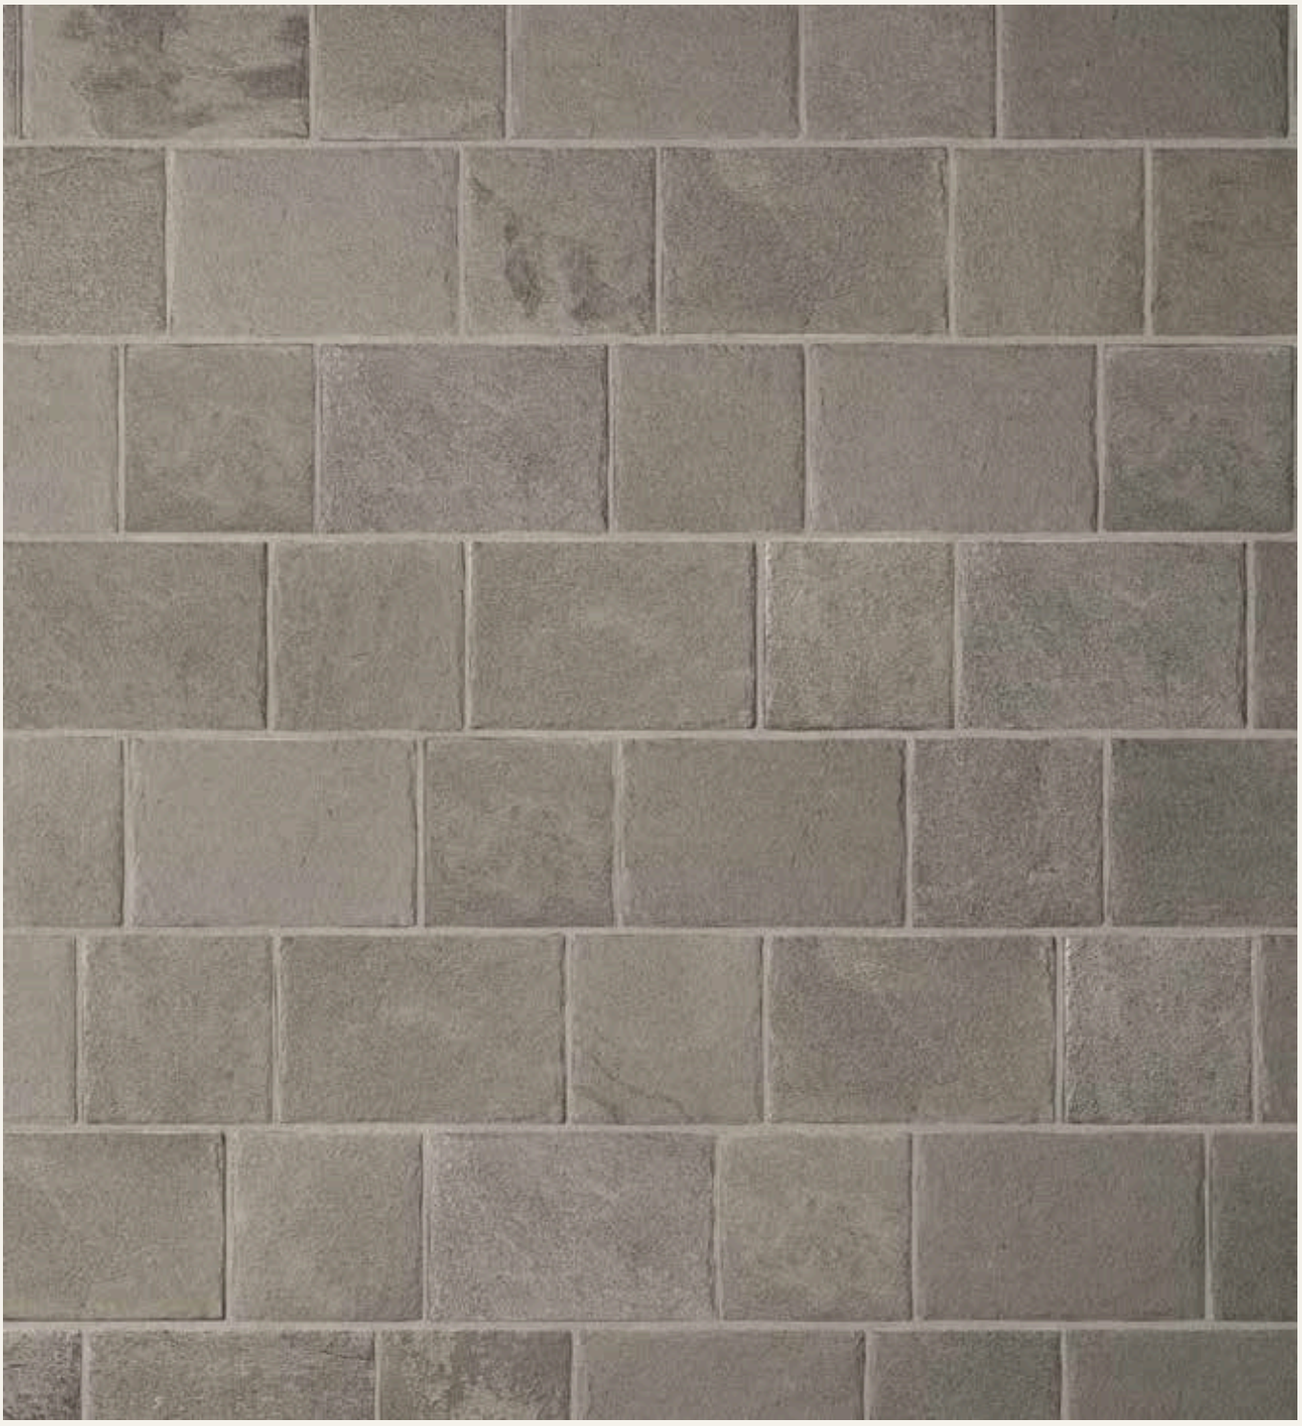

Kronos Block, June 2026 / PDF page 9

Open manufacturer source

Block

Porfido

Manufacturer face board




Kronos Block, June 2026 / PDF page 11

Open manufacturer source

Block

Cotto

Manufacturer face board

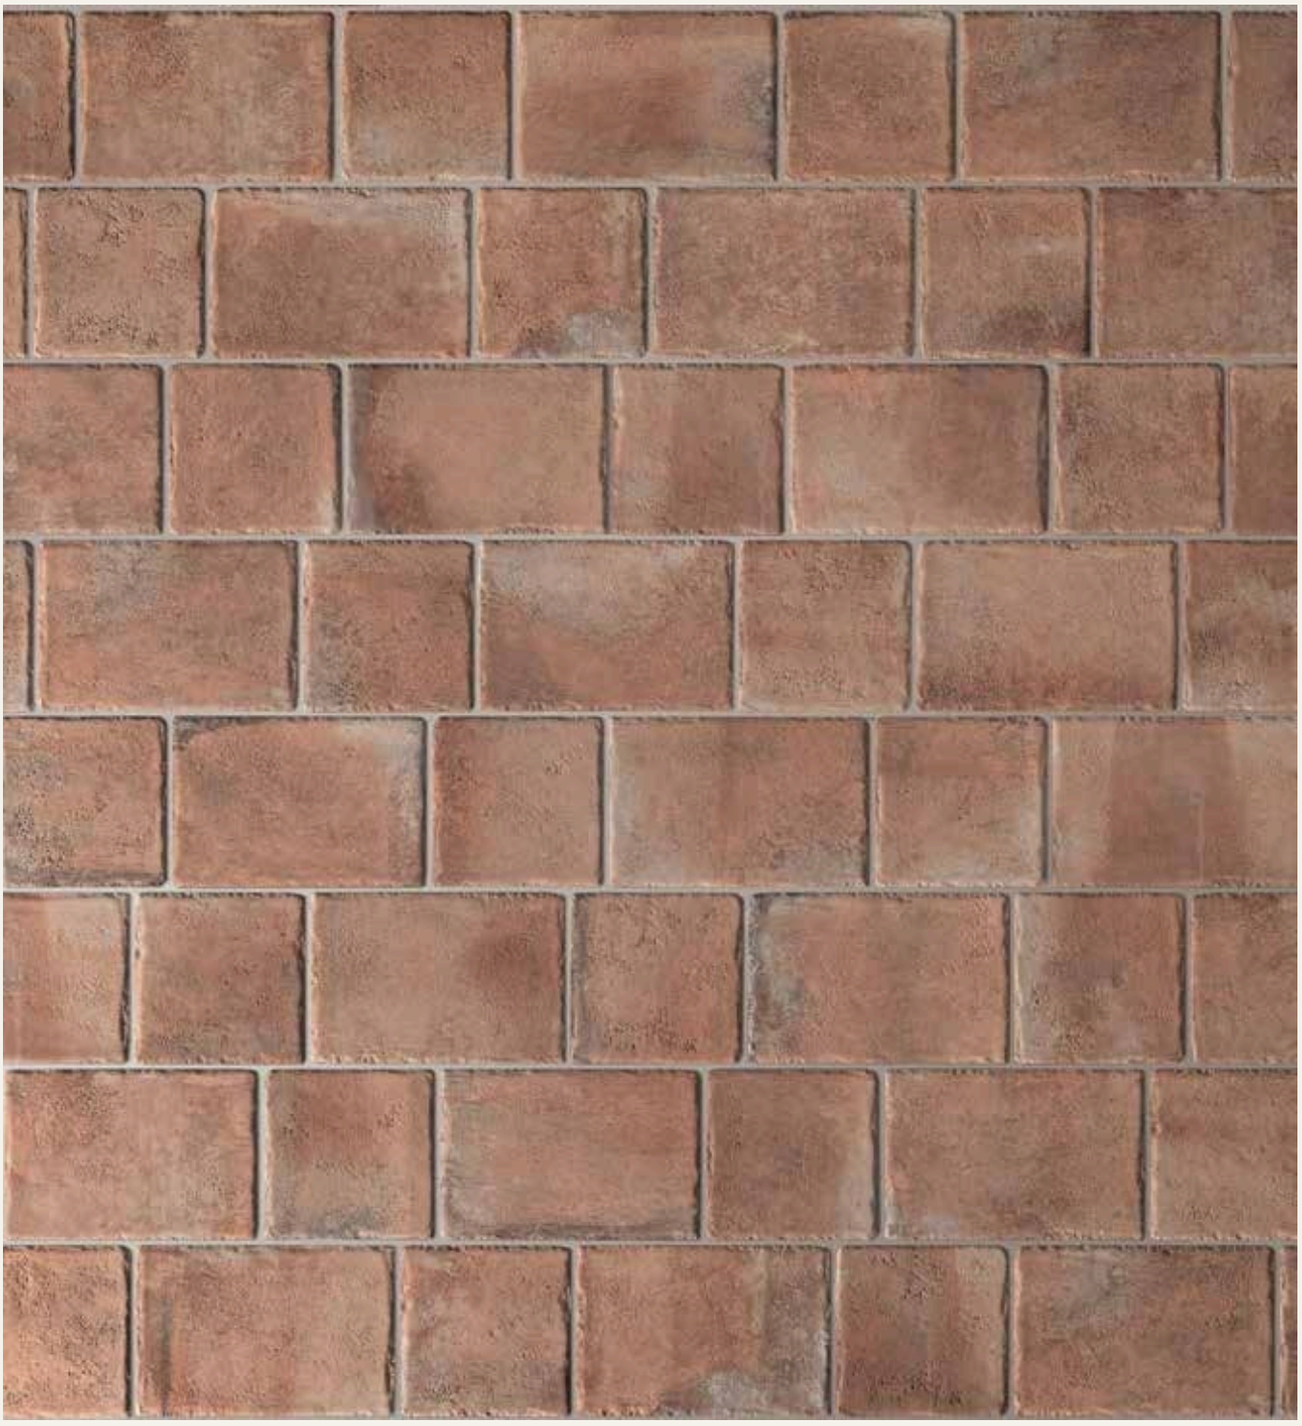

Kronos Block, June 2026 / PDF page 13

Open manufacturer source

Block

Bruges

Manufacturer face board



Kronos Block, June 2026 / PDF page 15

Open manufacturer source

Block

Gent

Manufacturer face board



Kronos Block, June 2026 / PDF page 17

Open manufacturer source

Block

Namur

Manufacturer face board



Kronos Block, June 2026 / PDF page 19

Open manufacturer source

Beyond Dolomite

Marble / Outdoor porcelain

Warm White

Paver + Companion tile

Cool White

Companion tile



Gray

Companion tile



Black

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Warm White Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Warm White Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte
Cool White Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte
Gray Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte
Black Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte
Warm White Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Cool White Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Gray Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Black Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer) • Vertical texture • Horizontal texture

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 inx11 in - 28x28 cm (Mosaic 1.8 inx5.5 in) - Apex; Pre-scored Stripes

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Beyond Dolomite

Specification notes / continued

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Exterior vertical use per official terms covering matte porcelain all collections. Not outdoor paving.

Pre-scored pieces are intended for grouting.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-beyond-dolomite-warm-white/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/beyond-dolomite/

Beyond Dolomite

Warm White

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 18

Open manufacturer source

Hero

Stone / Outdoor porcelain



Snow

Paver + Companion tile



Silver

Paver + Companion tile



Cord

Companion tile



Lead

Companion tile



Night

Companion tile



Coal

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Snow Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Silver Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Snow Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte
Cord Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte
Silver Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte
Lead Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte
Night Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte
Coal Companion tile	24 x 48 in, 12 x 24 in, 3 x 12 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm; 11 3/4 inx23 5/8 in - 30x60 cm; 2 3/4 inx11 3/4 in - 7x30 cm	Confirm by format Matte

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 3/4 inx11 3/4 in - 30x30 cm - Linear

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Hero

Specification notes / continued

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-hero-snow/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-hero-silver/

Hero

Silver

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 35

Open manufacturer source

Hero

Snow

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 35

Open manufacturer source

Travertino

Stone / Outdoor porcelain



Ivory

Paver + Companion tile



Silver

Companion tile



White

Companion tile



Sand

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Ivory Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Silver Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm	8 mm Matte glazed porcelain
White Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm	8 mm Matte glazed porcelain
Ivory Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm	8 mm Matte glazed porcelain
Sand Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm	8 mm Matte glazed porcelain

Travertino

Specification notes / continued

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in)

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Exterior vertical use based on manufacturer terms for matte porcelain allcollections. Not exteriorfloor. Confirm exteriorapprovalformountedmosaics.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-travertino-ivory/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/travertino/

Travertino

Ivory

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 43

Open manufacturer source

Coralstone

Stone / Outdoor porcelain



Ivory

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Ivory Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/coralstone-ivory/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Coralstone

Ivory

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 31

Open manufacturer source

Axi

Wood / Outdoor porcelain



White Pine

Paver



Gray Timber

Paver



Brown Chestnut

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Pine Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Gray Timber Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Brown Chestnut Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Axi

Specification notes / continued

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/axi-white-pine/
https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/
https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf
https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/axi-gray-timber/

Axi

White Pine

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 47

Open manufacturer source

Axi

Brown Chestnut

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 47

Open manufacturer source

Axi

Gray Timber

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 48

Open manufacturer source

Legacy Limestone

Stone / Outdoor porcelain



White

Paver + Companion tile



Silver

Paver + Companion tile



Ivory

Companion tile



Clay

Companion tile



Pearl

Companion tile



Harbor

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Silver Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
White Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
Ivory Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
Clay Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
Pearl Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
Silver Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
Harbor Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte
White Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Ivory Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Clay Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes

Legacy Limestone

Specification notes / continued

Color / component	Nominal formats	Thickness / finish
Pearl Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Silver Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Harbor Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Vertical stripes	Confirm by format Matte porcelain; Pre-scored Stripes

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer) • Vertical texture • Horizontal texture

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 7/16 inx11 7/16 in - 29x29 cm (Mosaic 5.7 inx1.8 in) - Brick; Pre-scored Stripes

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Exterior vertical use per official terms covering matte porcelain all collections. Not outdoor paving.

Pre-scored pieces are intended for grouting.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-legacy-limestone-white/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-legacy-limestone-silver/

Legacy Limestone

White

Manufacturer surface study




Atlas Concorde USA Outdoor Pavers 2026 / PDF page 37

Open manufacturer source

Legacy Limestone

Silver

Manufacturer surface study

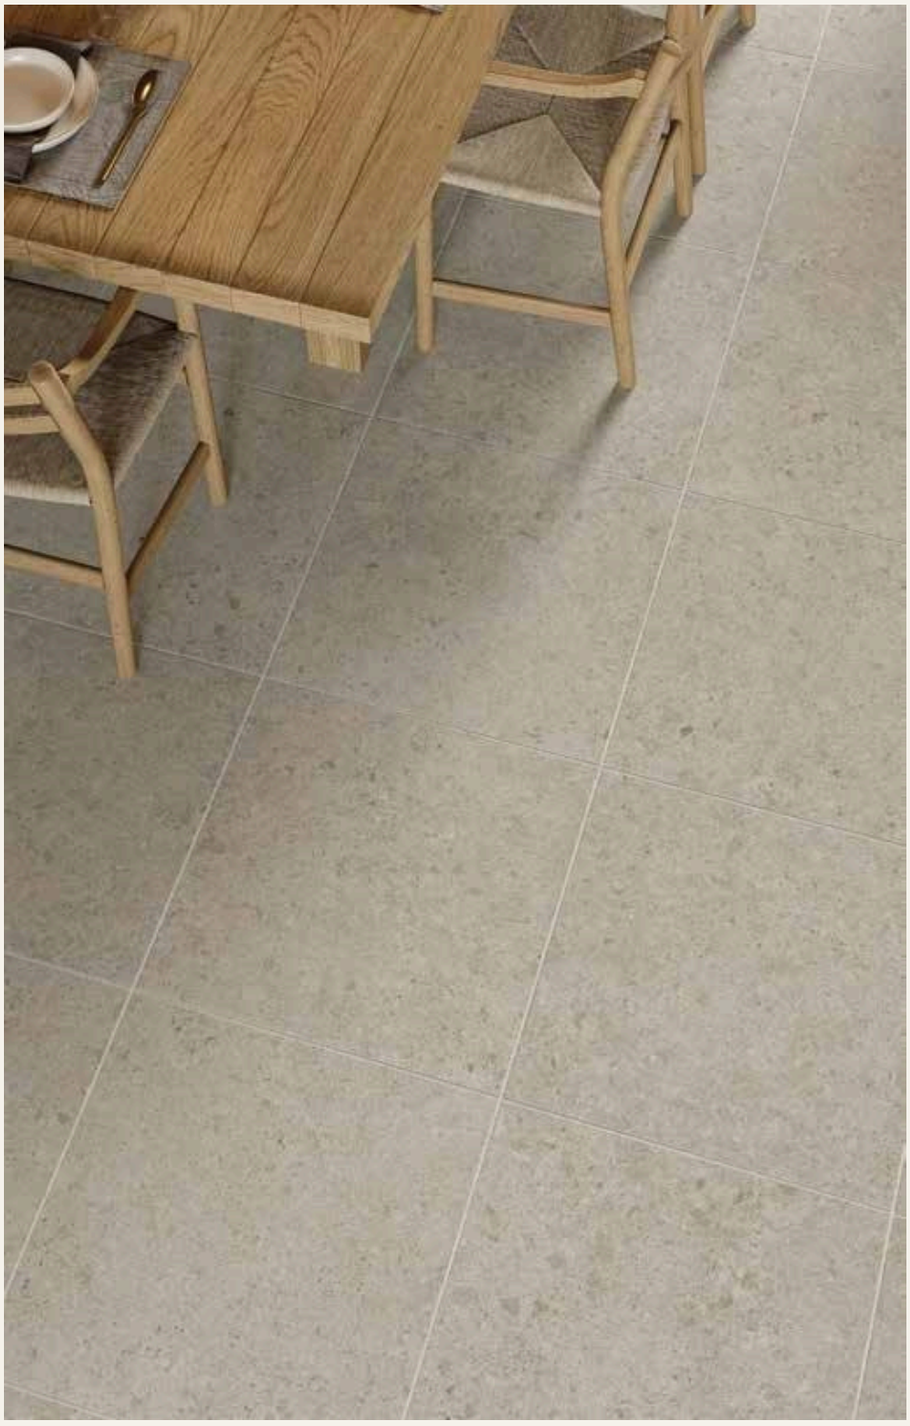

Atlas Concorde USA Outdoor Pavers 2026 / PDF page 37

Open manufacturer source

Beyond Taj Mahal

Marble / Outdoor porcelain



Alabaster

Paver + Companion tile



Pure

Companion tile



Champagne

Companion tile



Cloud

Companion tile



Noir

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Alabaster Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Pure Companion tile	24 x 48 in, 12 x 24 in, 4 x 4 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes; 4 inx4 in - 10x10 cm - Cut	Confirm by format Matte
Alabaster Companion tile	24 x 48 in, 12 x 24 in, 4 x 4 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes; 4 inx4 in - 10x10 cm - Cut	Confirm by format Matte
Champagne Companion tile	24 x 48 in, 12 x 24 in, 4 x 4 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes; 4 inx4 in - 10x10 cm - Cut	Confirm by format Matte
Cloud Companion tile	24 x 48 in, 12 x 24 in, 4 x 4 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes; 4 inx4 in - 10x10 cm - Cut	Confirm by format Matte
Noir Companion tile	24 x 48 in, 12 x 24 in, 4 x 4 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes; 4 inx4 in - 10x10 cm - Cut	Confirm by format Matte
Pure Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Alabaster Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Champagne Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Cloud Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes
Noir Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Stripes	Confirm by format Matte porcelain; Pre-scored Stripes

Beyond Taj Mahal

Specification notes / continued

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer) • Vertical texture • Horizontal texture

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 inx11 in - 28x28 cm - Star⨯ Pre-scored Stripes

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Exterior vertical use per official terms covering matte porcelain all collections. Not outdoor paving.

Pre-scored pieces are intended for grouting.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-beyond-taj-mahal-alabaster/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/beyond-taj-mahal/

Beyond Taj Mahal

Alabaster

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 16

Open manufacturer source

Boost Stone

Stone / Outdoor porcelain



White

Paver



Cream

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Cream Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/boost-stone-white/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Boost Stone


Specification notes / continued

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/boost-stone-cream/

Boost Stone

White

Manufacturer surface study

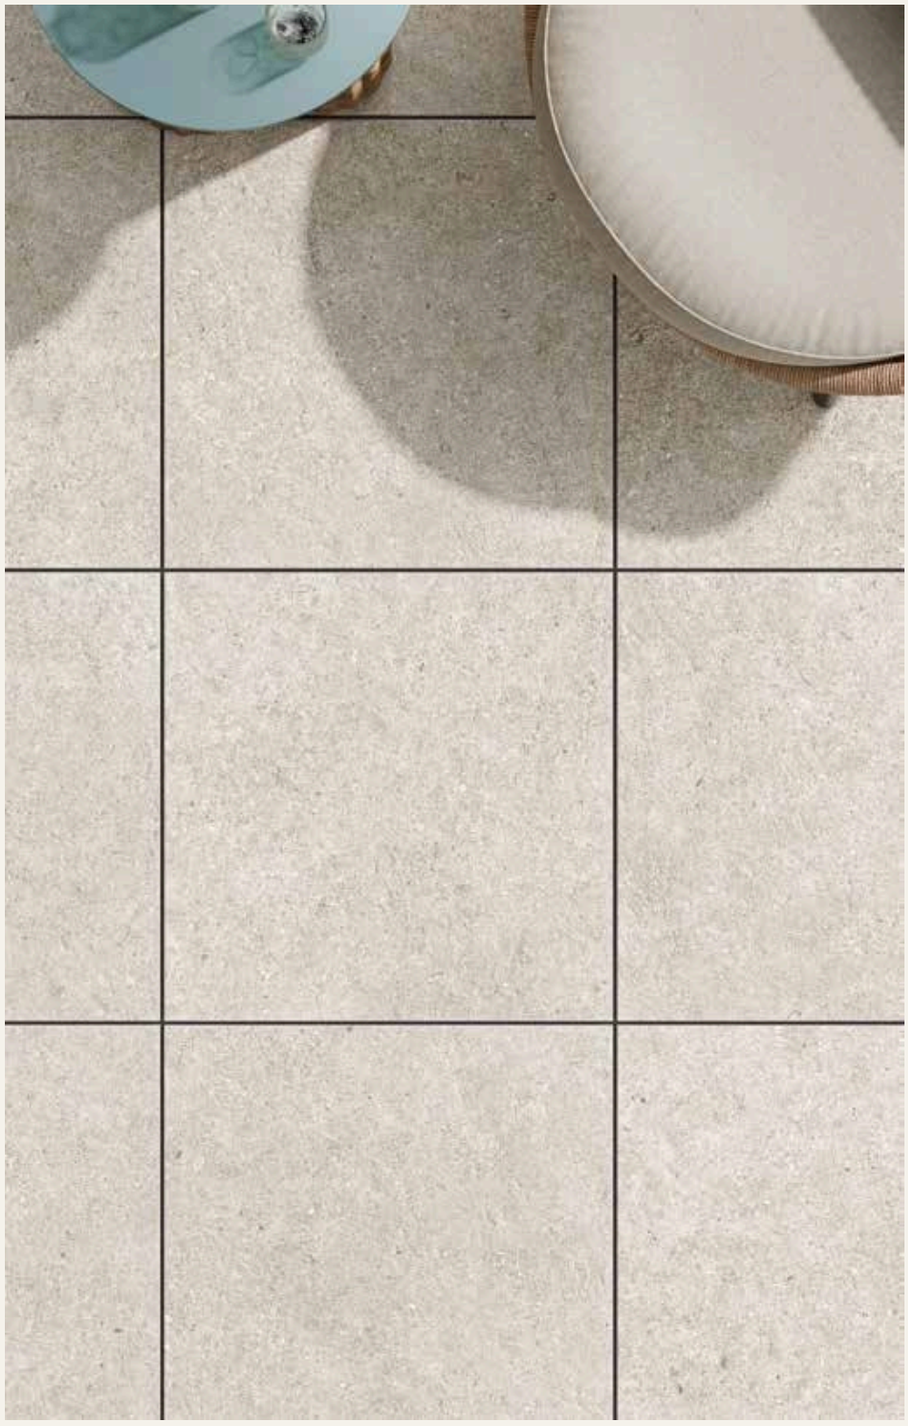

Atlas Concorde USA Outdoor Pavers 2026 / PDF page 26

Open manufacturer source

Boost Stone

Cream

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 26

Open manufacturer source

Legacy Marblestone

Stone / Outdoor porcelain



Sand

Paver + Companion tile



Steel

Paver + Companion tile



White

Companion tile




Cream

Companion tile



Dove

Companion tile



Black

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Sand Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Steel Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
White Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
Sand Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
Cream Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
Dove Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
Steel Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
Black Companion tile	24 x 48 in, 12 x 24 in, 8 x 48 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified; 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte
White Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa
Sand Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa
Cream Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa

Legacy Marblestone

Specification notes / continued

Color / component	Nominal formats	Thickness / finish
Dove Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa
Steel Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa
Black Companion tile	8 x 48 in Calibrated / supplier: 7 3/4 inx47 1/4 in - 20x120 cm - Cut - Spa	Confirm by format Matte porcelain; Pre-scored Spa

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer) • Vertical texture • Horizontal texture

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 21/32 inx11 49/64 in - 29.5x29.8 cm (Mosaic 4 inx1 in) - Domino; Pre-scored Spa

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Exterior vertical use per official terms covering matte porcelain all collections. Not outdoor paving.

Pre-scored pieces are intended for grouting.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-legacy-marblestone-sand/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-legacy-marblestone-steel/

Legacy Marblestone

Sand

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 39

Open manufacturer source

Legacy Marblestone

Steel

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 39

Open manufacturer source

Fray X

Concrete / Outdoor porcelain

Almond

Paver + Companion tile



Moon

Companion tile



Clay

Companion tile



Mist

Companion tile




Fog

Companion tile



Graphite

Companion tile



Trama Almond

Companion tile



Trama Mist

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Almond Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Almond Companion tile	24 x 48 in, 24 x 24 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 23 5/8 inx23 5/8 in - 60x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Moon Companion tile	24 x 48 in, 24 x 24 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 23 5/8 inx23 5/8 in - 60x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Clay Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Mist Companion tile	24 x 48 in, 24 x 24 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 23 5/8 inx23 5/8 in - 60x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Fog Companion tile	24 x 48 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Graphite Companion tile	24 x 48 in, 24 x 24 in, 12 x 24 in Calibrated / supplier: 23 5/8 inx47 1/4 in - 60x120 cm - Rectified; 23 5/8 inx23 5/8 in - 60x60 cm - Rectified; 11 3/4 inx23 5/8 in - 30x60 cm - Rectified	Confirm by format Matte
Trama Almond Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Trama	Confirm by format Matte
Trama Mist Companion tile	12 x 24 in Calibrated / supplier: 11 3/4 inx23 5/8 in - 30x60 cm - Rectified - Trama	Confirm by format Matte

Laying patterns

Straight grid • Custom modular layouts (cut-to-order) • Staggered layout (maximum30% offset on tiles20in or longer)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping; Bullnose 3 inx24 in - 7.2x60 cm; Cove Base 6 inx12 in - 15x30 cm - 8.5mm; 11 3/4 inx11 3/4 in - 30x30 cm (Mosaic 2 inx2 in); 11 7/32 inx13 3/4 in - 28.5x35 cm - Outline

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Fray X

Specification notes / continued

Specification notes

Exterior vertical surfaces only in this catalog entry. Confirm format,finish and setting system. Ceramic wall variants excluded. Mosaic backing/exterior use needs confirmation.

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-fray-x-almond/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

https://www.atlasconcordeusa.com/porcelain-tile-collections/fray-x/

Fray X

Almond

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 12

Open manufacturer source

Trust

Stone / Outdoor porcelain



Gold

Paver



Silver

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Gold Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Silver Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/trust-gold/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Trust

Specification notes / continued

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/trust-silver/

Trust

Gold

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 45

Open manufacturer source

Trust

Silver

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 45

Open manufacturer source

Flagstone

Stone / Outdoor porcelain



Select

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Select Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/flagstone-select/


https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Flagstone

Select

Manufacturer surface study

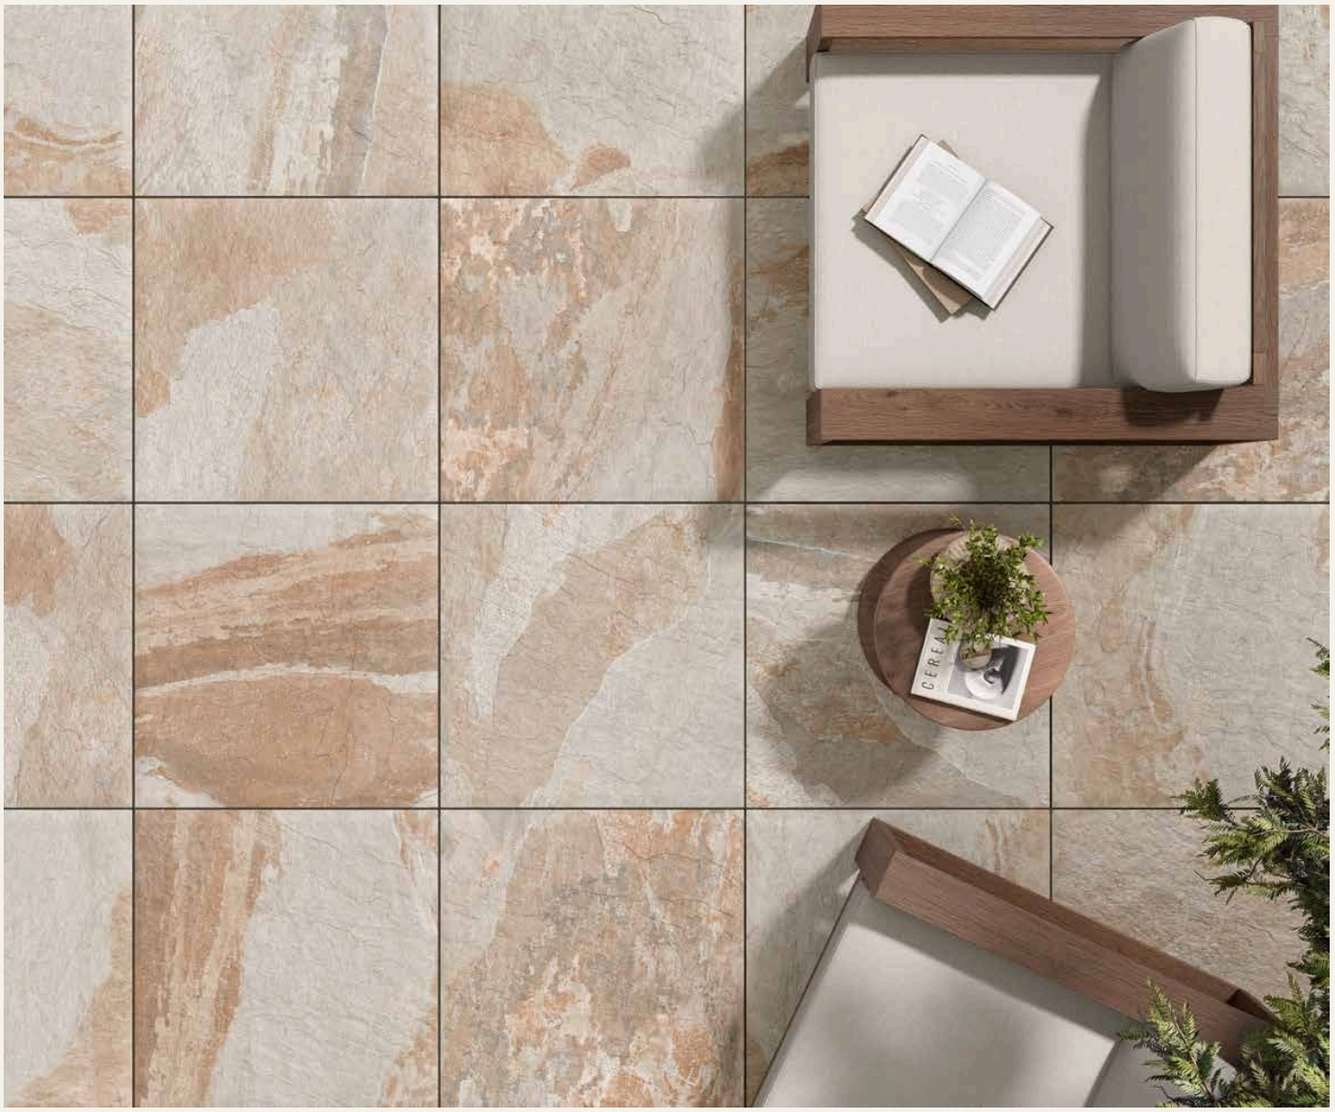

Atlas Concorde USA Outdoor Pavers 2026 / PDF page 33

Open manufacturer source

Fior Di Bosco

Marble / Outdoor porcelain



Gray

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Gray Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/fior-di-bosco-gray/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Fior Di Bosco

Gray

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 20

Open manufacturer source

Mark

Concrete / Outdoor porcelain



Chrome

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Chrome Paver	24 x 24 in, 24 x 48 in Calibrated / supplier: 23 5/8 x 23 5/8 in; 23 5/8 x 47 1/4 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in; 24 x 36 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/mark-chrome/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Mark

Chrome / 24 x 48

Manufacturer surface study




Atlas Concorde USA Outdoor Pavers 2026 / PDF page 14

Open manufacturer source

Mark

Chrome / 24 x 24

Manufacturer surface study

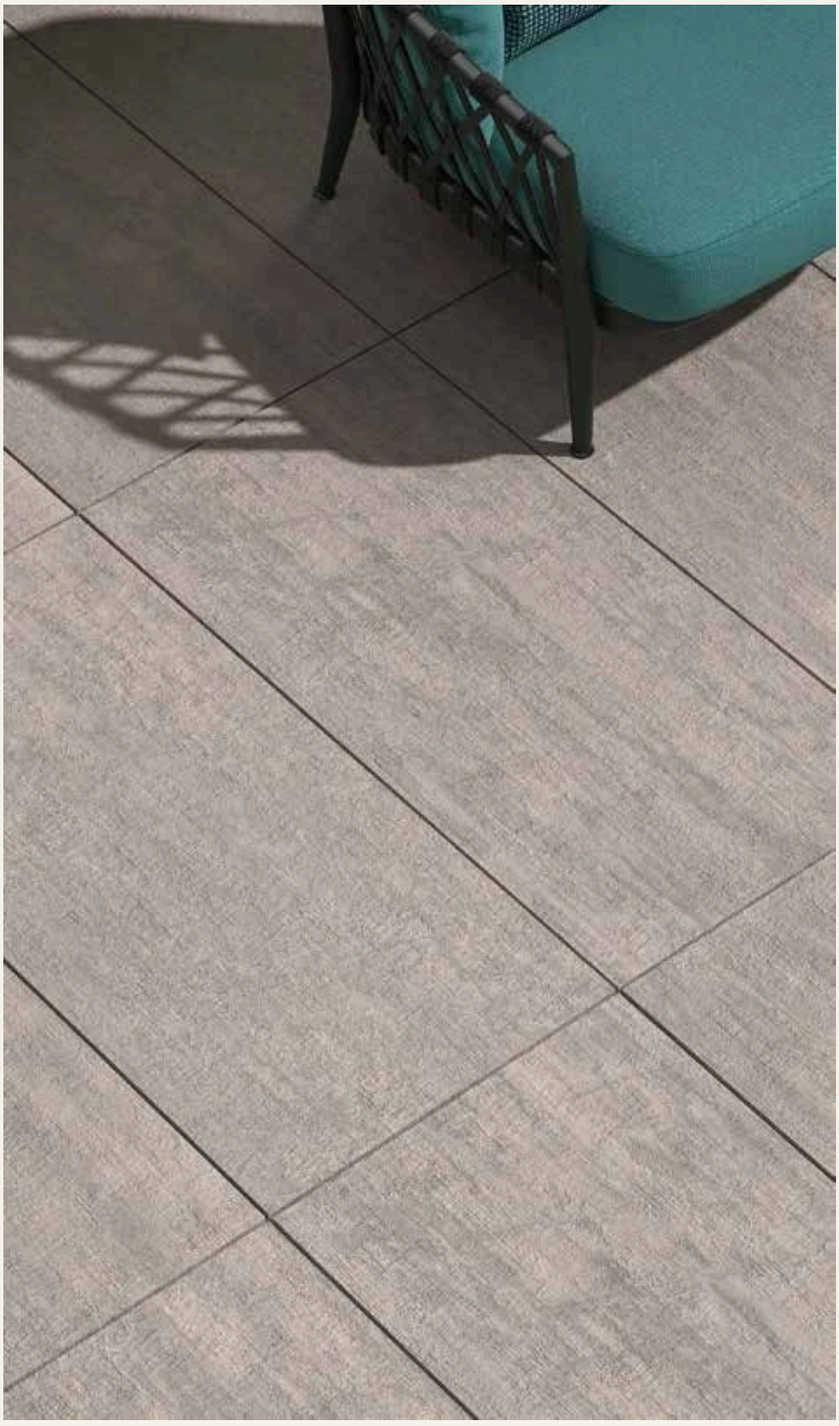

Atlas Concorde USA Outdoor Pavers 2026 / PDF page 14

Open manufacturer source

Seastone

Stone / Outdoor porcelain



Gray

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Gray Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/seastone-gray/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Seastone

Gray

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 41

Open manufacturer source

Memory Teak

Wood / Outdoor porcelain



Caramel

Paver



Umber

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Caramel Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified
Umber Paver	24 x 24 in Calibrated / supplier: 23 5/8 x 23 5/8 in	20 mm Sensitech textured outdoor surface; rectified

Laying patterns

Straight grid • Custom modular layouts (cut-to-order)

Coordinating pieces

Components: Made-to-order L-shaped coping; Bullnose coping; Stair-tread coping; Ease-edge coping

Specialty formats: 12 x 24 in; 12 x 48 in

Custom formats: 12 x 24 in; 12 x 12 in

Specification notes

Made-to-order trim minimum25pieces; confirm availability by color and project.

Custom cuts minimum500sqft and approval required.

Face range

The following manufacturer surface studies illustrate variation across installed tiles. Complete individual face sets and face counts, including companion tiles, remain unconfirmed.

Product references

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-memory-teak-caramel/

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/

https://api.atlasconcordeusa.com/storage/media/RESOURCES/atlas-concorde-usa-outdoor-pavers-2026-v1.pdf

Memory Teak

Specification notes / continued

https://www.atlasconcordeusa.com/porcelain-tile-collections/outdoor-pavers/outdoor-pavers-memory-teak-umber/

Memory Teak

Caramel

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 50

Open manufacturer source

Memory Teak

Umber

Manufacturer surface study



Atlas Concorde USA Outdoor Pavers 2026 / PDF page 50

Open manufacturer source

Dolomia

Stone / Outdoor porcelain



Almond / Vein cut

Paver + Companion tile + Coping



White / Vein cut

Paver + Companion tile + Coping



Almond

Paver



White

Paver



Grey

Paver



Gray / Crosscut

Companion tile



White / Crosscut

Companion tile

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Almond / Vein cut Paver SKU KS-4147	24 x 48 in Calibrated / supplier: 24x48	2cm Matte
White / Vein cut Paver SKU KS-4146	24 x 48 in Calibrated / supplier: 24x48	2cm Matte
Almond / Stone face Paver SKU KP-1805	24 x 36 in Calibrated / supplier: 24x36	2 cm Matte
White / Stone face Paver SKU KP-1802	24 x 36 in Calibrated / supplier: 24x36	2 cm Matte
Grey / Stone face Paver SKU KP-1803	24 x 36 in Calibrated / supplier: 24X36	2cm Matt
White / Vein cut Companion tile SKU KS-4149	24 x 48 in Calibrated / supplier: 24x48	0.9 cm Matte
Almond / Vein cut Companion tile SKU KS-4148	24 x 48 in Calibrated / supplier: 24x48	0.9 cm Matte
Gray / Crosscut Companion tile SKU KP-1992	24 x 48 in Calibrated / supplier: 24x48	3/8" Matte
White / Crosscut Companion tile SKU KP-1991	24 x 48 in Calibrated / supplier: 24x48	3/8" Matte
Almond / Vein cut Coping SKU KS-4154	12 x 24 in Calibrated / supplier: 12x24	2cm Matte
White / Vein cut Coping SKU KS-4153	12 x 24 in Calibrated / supplier: 12x24	2cm Matte

Laying patterns

Straight lay • Rectangular grid; offset layout requires selected-product confirmation • Continuous edge course

Coordinating pieces

Components: Bullnose coping

Dolomia

Specification notes / continued

Specification notes

Official SKU sheet currently lists exterior use and frost resistance. Confirm substrate, wet traction, selected finish and installation system.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.

Product references

https://www.keystonetile.com/product/24x48-dolomia-white-vein-cut-porcelain-pavers/

https://www.keystonetile.com/product/12x24-dolomia-almond-vein-cut-porcelain-bullnose/

https://www.keystonetile.com/product/12x24-dolomia-white-vein-cut-porcelain-bullnose/

https://www.keystonetile.com/product/24x48-dolomia-white-vein-cut-matt-porcelain-tile/

Luxor

Stone / Outdoor porcelain



Sand

Paver

Natural

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Sand / Stone face Paver SKU KS-4502	24 x 24 in Calibrated / supplier: 24x24	2cm Matte
Natural / Stone face Paver SKU KS-4140	24 x 48 in Calibrated / supplier: 24x48	2cm Matte

Laying patterns

Straight lay • Rectangular grid; offset layout requires selected-product confirmation

Specification notes

Official SKU sheet currently lists exterior use and frost resistance. Confirm substrate, wet traction, selected finish and installation system.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.

Product references

https://www.keystonetile.com/product/24x24-luxor-sand-porcelain-pavers/

https://www.keystonetile.com/product/24x48-luxor-natural-porcelain-pavers/

Agathos

Marble / Outdoor porcelain



White

Paver



Multicolor

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White / Stone face Paver SKU KP-2171	24 x 48 in Calibrated / supplier: 24x48	2cm Matt
Multicolor / Stone face Paver SKU KP-2170	24 x 48 in Calibrated / supplier: 24x48	2cm Matt

Laying patterns

Straight lay • Rectangular grid; offset layout requires selected-product confirmation

Specification notes

Official SKU sheet currently lists exterior use and frost resistance. Confirm substrate, wet traction, selected finish and installation system.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.


Product references

https://www.keystonetile.com/product/24x48-agathos-white-porcelain-pavers/

https://www.keystonetile.com/product/24x48-agathos-multicolor-porcelain-pavers/

Flatiron

Metal / Outdoor porcelain

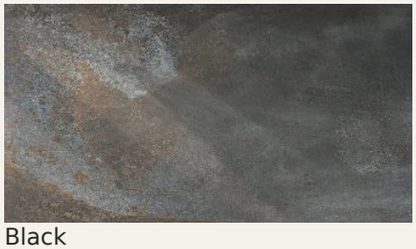

Black

Paver



Rust

Paver + Companion tile



White

Paver

Formats by color and component

Color / component	Nominal formats	Thickness / finish
Black / Stone face Paver SKU KP-2176	24 x 48 in Calibrated / supplier: 24x48	2cm Matt
Rust / Stone face Paver SKU KP-2175	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
White / Stone face Paver SKU KP-2174	24 x 48 in Calibrated / supplier: 24x48	2cm Matt
Rust / Stone face Companion tile SKU KP-2181	24 x 48 in Calibrated / supplier: 24x48	1.2cm Matte

Laying patterns

Straight lay • Rectangular grid; offset layout requires selected-product confirmation

Specification notes

Official SKU sheet currently lists exterior use and frost resistance. Confirm substrate, wet traction, selected finish and installation system.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.

Product references

https://www.keystonetile.com/product/24x48-flatrion-rust-porcelain-paver/

https://www.keystonetile.com/product/24x48-flatiron-black-porcelain-pavers/

https://www.keystonetile.com/product/24x48-flatiron-rust-porcelain-tile/

Flatiron

Specification notes / continued

https://www.keystonetile.com/product/24x48-flatiron-white-porcelain-pavers/

Urbe

Stone / Outdoor porcelain


White Gray

Paver



Cream

Paver + Coping

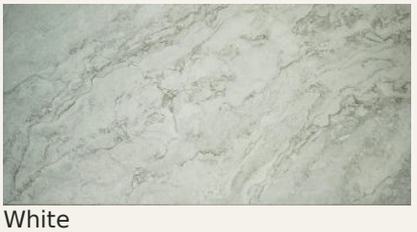

White

Coping

Formats by color and component

Color / component	Nominal formats	Thickness / finish
White Gray / Stone face Paver SKU KP-1838	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
Cream / Stone face Paver SKU KP-2017	24 x 48 in Calibrated / supplier: 24x48	2 cm Matte
Cream / Stone face Coping SKU KP-2041	12 x 24 in Calibrated / supplier: 12x24	2cm Matte
White / Stone face Coping SKU KP-1951	12 x 24 in Calibrated / supplier: 12x24	2cm Matte

Laying patterns

Straight lay • Rectangular grid; offset layout requires selected-product confirmation • Continuous edge course

Coordinating pieces

Components: Bullnose coping

Specification notes

Official SKU sheet currently lists exterior use and frost resistance. Confirm substrate, wet traction, selected finish and installation system.

Supplier title identifies porcelain but technical material field says natural stone. Confirm exact fabrication material before specification.

Face range

A complete manufacturer face series was not verified for this collection. The color swatches show the published product reference only. Obtain the selected format and current lot range board; unique-face count remains unconfirmed.

Urbe

Specification notes / continued

Product references


https://www.keystonetile.com/product/12x24-urbe-cream-porcelain-bullnose-coping-new/
https://www.keystonetile.com/product/24x48-urbe-cream-porcelain-pavers/
https://www.keystonetile.com/product/12x24-urbe-white-porcelain-bullnose-coping/
https://www.keystonetile.com/product/24x48-urbe-white-gray-porcelain-pavers/

The laying library

Square grid, rectangular grid and offset layouts. The following pages retain original manufacturer modular diagrams and published piece ratios.


Straight grid

Align square or rectangular tiles on a continuous joint grid. Match the selected color and calibrated format.

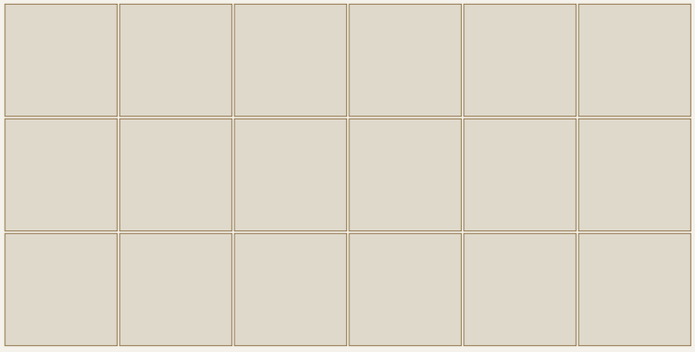

One-third offset

Maximum one-third where the exterior paver instructions permit. Companion Atlas tiles with a 30% limit must remain at or below 30%.

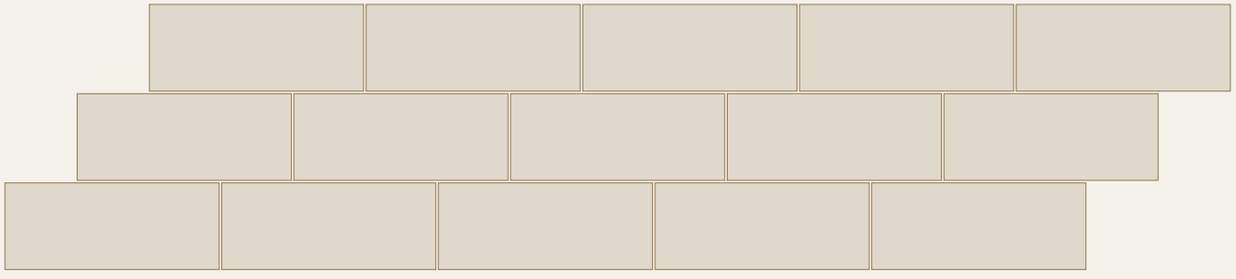

Format and joint coordination

Nominal sizes do not establish a modular repeat. Verify calibrated dimensions plus joint widths before ordering cuts or issuing setting-out drawings.

Three-size modular layouts

Kronos PoPa 2.0 Organizer / PDF p. 55


106 ← POPA 2.0 ORGANIZER

PATTERNS

pattern A




Nr. 1 pcs	23½"x 23½" - 60x60 cm	57,2%
Nr. 1 pcs	11¾"x 23½" - 30x60 cm	28,5%
Nr. 1 pcs	11¾"x 11¾" - 30x30 cm	14,3%

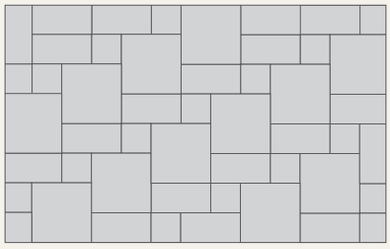

pattern B




Nr. 1 pcs	23½"x 23½" - 60x60 cm	40%
Nr. 2 pcs	11¾"x 23½" - 30x60 cm	40%
Nr. 2 pcs	11¾"x 11¾" - 30x30 cm	20%

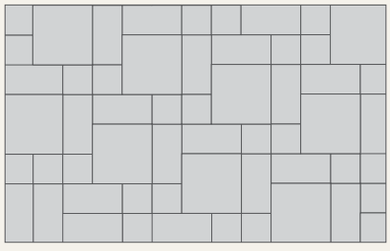


pattern C




Nr. 2 pcs	23½"x 23½" - 60x60 cm	44,5%
Nr. 3 pcs	11¾"x 23½" - 30x60 cm	33,3%
Nr. 4 pcs	11¾"x 11¾" - 30x30 cm	22,2%

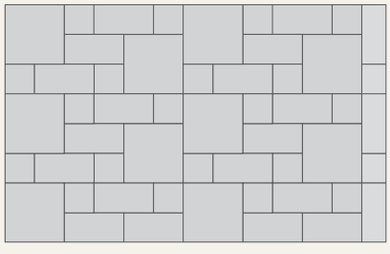

pattern D




Nr. 1 pcs	23½"x47⅛" - 60x120 cm	40%
Nr. 2 pcs	23½"x 23½" - 60x60 cm	40%
Nr. 2 pcs	11¾"x 23½" - 30x60 cm	20%

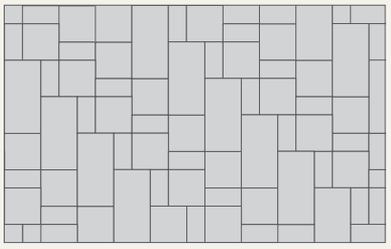

pattern E




Nr. 1 pcs	11¾"x 23½" - 30x60 cm	66,7%
Nr. 1 pcs	11¾"x 11¾" - 30x30 cm	33,3%

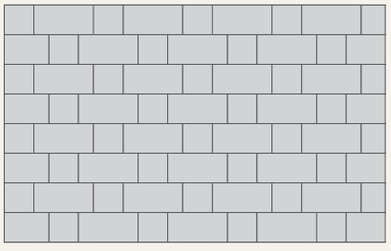

pattern F



Nr. 1 pcs	23½"x 23½" - 60x60 cm	50%
Nr. 2 pcs	11¾"x 23½" - 30x60 cm	50%

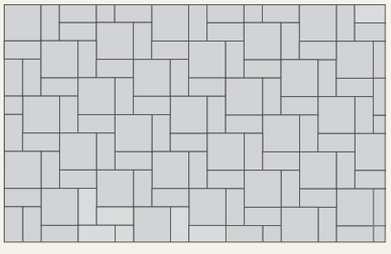


Original manufacturer geometry. Confirm selected color, finish, calibrated sizes and joint allowance before use.


Pennsylvania / Heritage layouts

Kronos Pennsylvania 2026 / PDF p. 17


LAYING PATTERNS




A LAYING SOLUTION
NR 1 pcs 24"x24" - 57,2%
NR 1 pcs 12"x24" - 28,5%
NR 1 pcs 12"x12" - 14,3%



B LAYING SOLUTION
NR 1 pcs 24"x24" - 40%
NR 2 pcs 12"x24" - 40%
NR 2 pcs 12"x12" - 20%




C LAYING SOLUTION
NR 2 pcs 24"x24" - 44,5%
NR 3 pcs 12"x24" - 33,3%
NR 4 pcs 12"x12" - 22,2%



D LAYING SOLUTION
NR 1 pcs 24"x48" - 40%
NR 2 pcs 24"x24" - 40%
NR 2 pcs 12"x24" - 20%


HERITAGE LAYING PATTERNS



MINUMIM ORDER 5
FULL PALLET


232,50 sqft/pallet

pallet composition

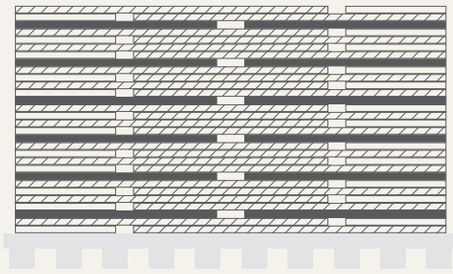

One pallet contains 6 sets, for a total of 12 patterns per pallet. **Patterns are sold only in full set of 2.**

24x (12"x24") loose pcs
12x (24"x24") loose pcs
24x (24"x36") loose pcs



Each set contains 2 patterns.
Patterns are sold only in full set of 2.

30 | PENNSYLVANIA


Original manufacturer geometry. Confirm selected color, finish, calibrated sizes and joint allowance before use.

Pennsylvania / Block layouts


Kronos Pennsylvania 2026 / PDF p. 17

BLOCK LAYING PATTERNS

Installation layouts for indoor floors and outdoor paving, drives and pedestrian areas

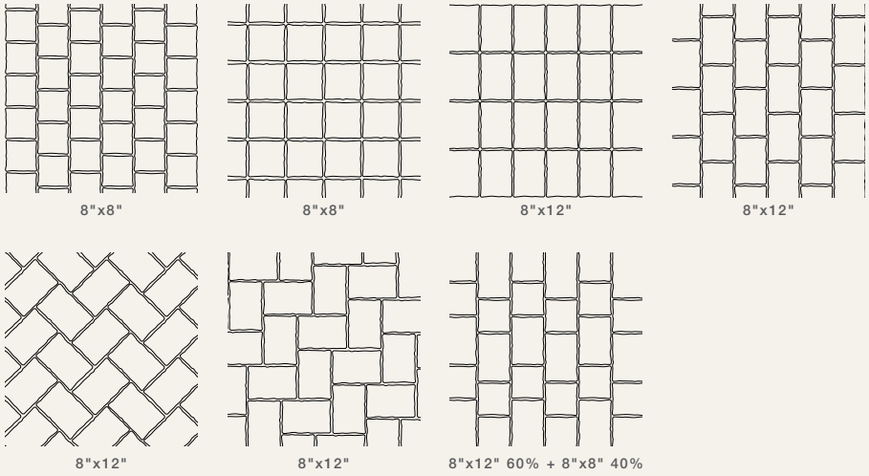

Walkway installation

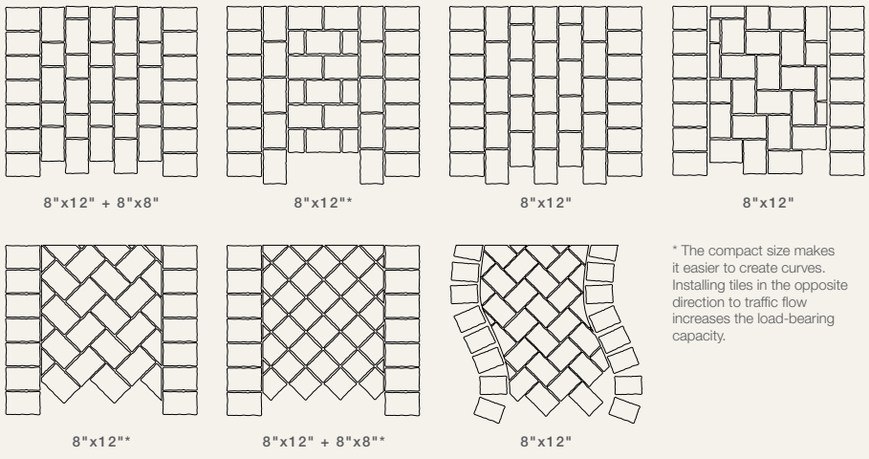

* The compact size makes it easier to create curves. Installing tiles in the opposite direction to traffic flow increases the load-bearing capacity.


Original manufacturer geometry. Confirm selected color, finish, calibrated sizes and joint allowance before use.


Block / small-format layouts


Kronos Block 2026 / PDF p. 21


LAYING PATTERNS

Installation layouts for indoor floors and outdoor paving, drives and pedestrian areas



8"x8"



8"x8"


8"x12"



8"x12"



8"x12"



8"x12"



8"x12" 60% + 8"x8" 40%


Walkway installation



8"x12" + 8"x8"



8"x12"*


8"x12"


8"x12"


8"x12"*


8"x12" + 8"x8"*


8"x12"


* The compact size makes it easier to create curves. Installing tiles in the opposite direction to traffic flow increases the load-bearing capacity.

Original manufacturer geometry. Confirm selected color, finish, calibrated sizes and joint allowance before use.

Woods / plank layouts

Nominal 12 x 48 in and 24 x 48 in. Confirm color-specific availability and calibrated dimensions. Diagrams show laying geometry.

12 x 48 / stack bond

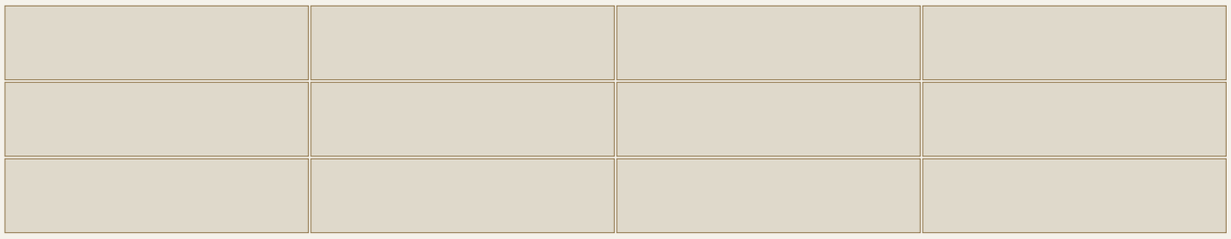

24 x 48 / one-third offset




Use a maximum one-third offset for long rectangular pavers. Blend pieces from multiple boxes and approve the delivered face range before laying.

Compose the surface.


Geometry studies for approved color-specific formats. Use the calibrated tile sizes and designed joint width.

01 / Square grid

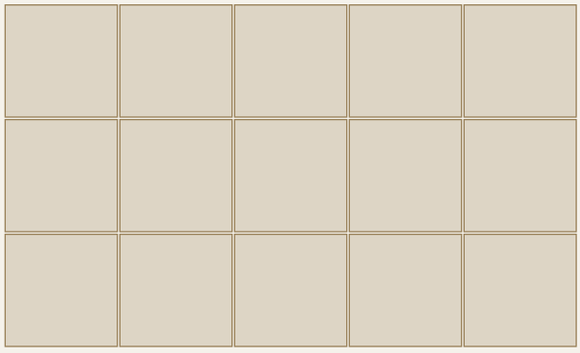


A quiet architectural grid for square pavers.

02 / Rectangular grid

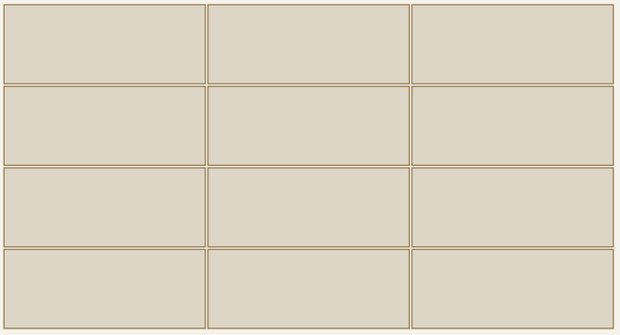

Aligned joints emphasize the long dimension.

03 / One-third offset

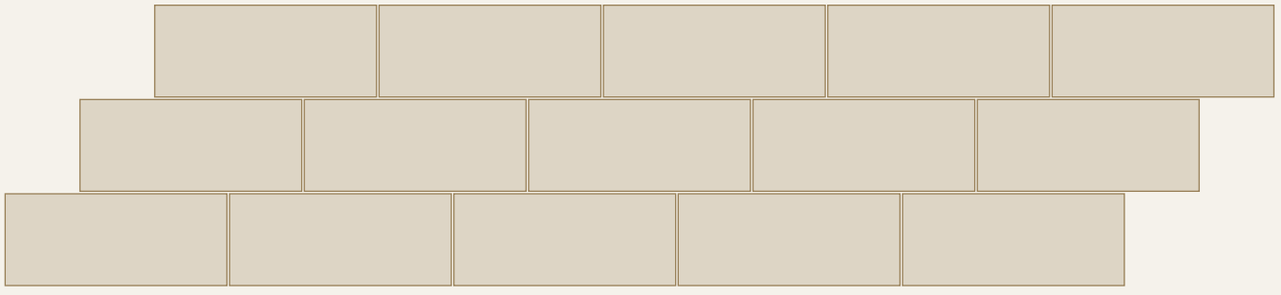


Keep long rectangular pavers at a maximum one-third offset where permitted. Selected companion tiles may be limited to 30%.

Layouts are schematic. The collection tables and current manufacturer instructions govern format compatibility, offset and joint requirements.

A more crafted rhythm.


Small-format courses and custom-cut options bring a more European cadence to paths, entries and terraces.

04 / Basketweave

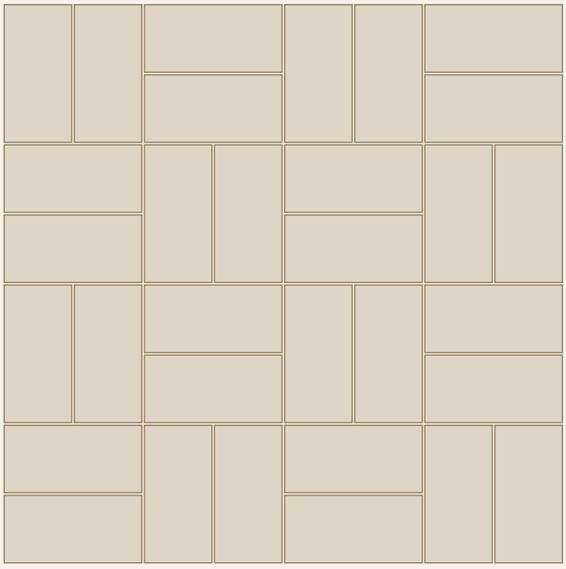

Use compatible 2:1 units, such as a nominal 12 x 24 format only where the actual caliber and joint module work.

05 / Herringbone

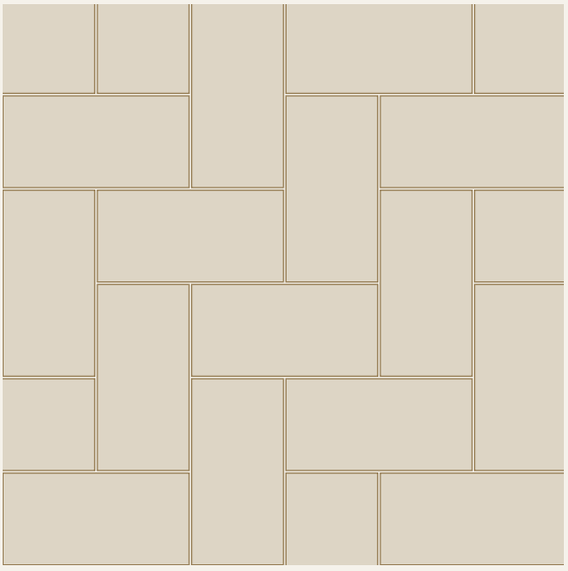

Use an approved rectangular unit and verify cuts, perimeter restraint and the exact repeat before release.

06 / Manufacturer modular layouts

The preceding laying-library pages retain Kronos modular ratios and Pennsylvania / Block patterns. Use those original diagrams with the specified pack and calibrated sizes. A Heritage pack is distinct from a standard field-size order.

Custom cutting is subject to supplier acceptance, minimums, edge quality and lead time. These studies are layout options, not a statement that every collection supports every pattern.

Luxury begins below.

Three material priorities. Four site-specific assembly routes.

GFTK / Our first choice

vdw 480 Trass bedding + vdw 495 adhesion elutriant. Our preferred bed-and-bond pairing for premium drainable porcelain terraces.

LATICRETE / The bonded system

255 MULTIMAX setting mortar, an exterior-rated bonded anti-fracture mat, SPECTRALOCK PRO Premium field grout and LATASIL movement joints.

3 lb EPS / The lightweight strategy

Specify nominal 3 lb/ft3 EPS for the engineered foam options. Its grade, thickness, load distribution and drainage details belong in the project submittal.

The following sections show layer order, product roles and field execution. Obtain written acceptance of the complete exterior assembly for the site. Density alone does not approve a paving system.

ELEVATION
OUTDOOR TILE

Four routes. One standard.

The finish is selected for beauty. The assembly is selected for the site, exposure, load, and drainage route.

01

GFTK / OUR FIRST CHOICE

vdw 480 Trass + vdw 495 adhesion elutriant

Our benchmark for premium drainable porcelain paving. A coordinated bed, bond, and joint system selected for stable support and water management.

02

ENGINEERED EPS FOAM

Lightweight fill / elevation or thermal strategy

Project-specific engineered option. Requires an approved load-spreading surface and written compatibility confirmation.

03

OPEN-GRADED BASE + EPS

Drainage-first base with an insulation layer

Engineered option. Check water paths above and below foam, lateral discharge, long-term load response, and edge support.

04

BONDED CONCRETE OVERLAY

Porcelain over prepared, sloped concrete

Exterior-rated LATICRETE components. Obtain confirmation of the complete substrate, membrane, mortar, grout, and joint detail.

START WITH A DRAINAGE DECISION

A permeable assembly moves water through its layers. A bonded overlay manages water at the surface and membrane. Do not combine their joint or bedding rules without written approval.

ELEVATION
OUTDOOR TILE

The foundation of exceptional paving.

GFTK vdw 480 Trass bedding and vdw 495 adhesion elutriant: our preferred pairing for a premium drainable porcelain paving system.

01	Exterior porcelain + compatible resin joints	Use a ceramic joint product accepted for the complete system.
02	GFTK vdw 495 adhesion elutriant	The bond: secure porcelain to fresh Trass bedding wet-to-wet.
03	GFTK vdw 480 Trass bedding	The foundation: frost-resistant, highly permeable drainage mortar.
04	Designed drainable aggregate foundation	Load-bearing support, compacted as specified.
05	Separation geotextile / prepared soil	Base depth and soil separation designed for actual conditions.
06	Collector / positive discharge	Water must leave the base without saturating adjacent foundations.

SCHEMATIC / NOT TO SCALE

GFTK / THE ELEVATION STANDARD

We lead with a complete GFTK assembly: vdw 480 Trass bedding, vdw 495 adhesion elutriant, and compatible two-component paving joints. Premium performance begins with the system beneath the surface. [07, 08]

Trass is a drainage bedding system, not joint sand. Approval of Trass components does not approve an EPS hybrid, driveway, rooftop, or unsupported paver condition. Base design and final use remain project-specific.

ELEVATION
OUTDOOR TILE

Two specialists.
One exceptional foundation.



VDW 480 / THE BED

A high-strength, frost-resistant drainage mortar. Specified aggregate and an engineered drainable base create continuous support with a route for water. [07]

VDW 495 / THE BOND

The adhesion elutriant links porcelain to the Trass bed. Apply wet-to-wet and maintain full, even support; avoid isolated mortar pads. [07]

RESIN JOINT COMPATIBILITY

Match width, full supported depth, load rating, bedding, and cure. A 20 mm paver alone may not provide a joint product's required depth.

WEATHER AND CURE

PHNA lists application temperatures of 41-77°F for vdw 480/495. Protect fresh work and use the current instructions for rain, frost, and opening to traffic.

For a drainable Trass assembly, use the approved permeable jointing product. Do not substitute SPECTRALOCK as a default joint filler. Layer thickness and cure depend on the selected system. [07, 08]

ELEVATION
OUTDOOR TILE

Lightness, with a design brief.

EPS can serve as engineered lightweight fill or insulation. It is one component of a designed paving assembly.

01	Exterior porcelain finish	Approved thickness, format, and service use.
02	Designed setting and support system	Load distribution and tile support specified by the design team.
03	3 lb/ft3 engineered EPS geofoam	Grade and thickness selected for sustained and point loads.
04	Prepared bearing / drainage layer	Uniform support and a positive discharge route.
05	Separation and prepared subgrade	Soils, frost exposure, and compaction reviewed for the site.

SCHEMATIC / NOT TO SCALE

DESIGN FOR LOAD

Evaluate furniture feet, concentrated loads, snow, sustained compression, creep, and construction traffic. Density alone does not establish capacity.

DESIGN FOR WATER

Check groundwater and buoyancy, drainage, foam exposure, and compatibility with adjacent products. Keep solvents away from unprotected EPS.

EPS option requires project-specific engineering and written system acceptance. Do not bond porcelain or generic thin-set directly to bare EPS. Insulfoam data describes the foam material, not an approved porcelain terrace system. [09]

ELEVATION
OUTDOOR TILE

A drainage-first foundation.

A clean aggregate base and EPS layer can be evaluated together, provided the foam does not trap water or compromise paver support.

01	Porcelain + assembly-specific joints	Joint product must match bedding stability and available depth.
02	Approved bedding / load distribution	A designed support layer; not a universal loose-stone recipe.
03	3 lb/ft3 EPS insulation layer, if approved	Continuity, thickness, joints, and long-term bearing verified.
04	Designed open-graded stone base	Clean, angular aggregate. Gradation and depth by design.
05	Separation geotextile	Selected for the actual soil and aggregate interaction.
06	Prepared subgrade + collector	Slope to an accessible, lawful outlet; avoid a trapped basin.

SCHEMATIC / NOT TO SCALE

ABOVE AND BELOW THE FOAM

Show both drainage paths. Provide lateral relief or a designed drainage layer wherever EPS interrupts vertical flow.

COLORADO SOILS

EPS does not eliminate expansive-soil movement or frost heave. Site geotechnical conditions govern excavation, bearing, insulation, and drainage.

A 3 lb/ft³ density request is not a complete foam specification. Require the exact ASTM grade, load/creep criteria, thermal design, and complete assembly acceptance. EPS hybrid approval remains project-specific. [09]

ELEVATION
OUTDOOR TILE

Precision, layer by layer.

255 MULTIMAX setting mortar. A bonded anti-fracture membrane mat. A prepared concrete slab. A carefully detailed porcelain finish.

01	Porcelain / 3/16 in spacers	3/16 in field joints with SPECTRALOCK PRO Premium epoxy grout.
02	LATICRETE 255 MULTIMAX	Tile-setting mortar. Full support and verified coverage beneath each unit.
03	Exterior-rated anti-fracture mat	Bonded crack-isolation layer; exact mat approved for exterior use.
04	Mat-to-slab bonding layer	Use the mat manufacturer-approved mortar, adhesive, or primer system.
05	Prepared concrete slab	Sound, clean, properly sloped; repair and prepare before bonding.

ASSEMBLY / TOP TO BOTTOM / NOT TO SCALE

3/16 IN FIELD JOINTS / FLEXIBLE MOVEMENT JOINTS

Use 3/16 in spacers to establish the field layout, then grout with SPECTRALOCK PRO Premium. Keep LATASIL at designed movement joints, perimeters, and changes of plane. Soft joints are sized separately. [02-06]

Basis of design: 255 MULTIMAX and an exterior-rated bonded mat. Confirm the exact products and complete exterior-floor assembly in writing. Anti-fracture performance does not establish waterproofing; add the selected system waterproofing detail where required.

ELEVATION
OUTDOOR TILE

A complete installation language.

The specified mortar, mat, joints, and slab support the same architectural goal: a clean, durable porcelain plane.

255 MULTIMAX

The porcelain setting mortar

Specified lightweight polymer-modified large-and-heavy-tile mortar. Confirm current availability, the exact SKU, and approval with the selected exterior mat. [02]

BONDED ANTI-FRACTURE MAT

The crack-isolation layer

Select an exterior-rated membrane mat and its approved slab-bonding materials. Waterproofing is a separate requirement if the mat does not provide it. [03]

SPECTRALOCK PRO PREMIUM

The 3/16 in field joint

Set the field with 3/16 in spacers. Finish ordinary joints with epoxy grout, following the tile and grout requirements and the approved mock-up. [04]

LATASIL

The movement-joint sealant

Keep the moving details flexible. Specify sealant, backing, primer, and joint width for the actual exposure. Never fill these joints with rigid epoxy. [05]

THE MAT AND WATERPROOFING HAVE DIFFERENT JOBS

The chosen mat must be accepted for exterior slab use. If using STRATA_MAT, follow its exterior detail with HYDRO BAN beneath the mat; it is not itself waterproof. Confirm 255 MULTIMAX compatibility for that exact assembly. [03]

Set the standard. Check every layer.

Resolve the slab, membrane, bond, and joints before opening the terrace to use.

01 / ASSESS AND PREPARE

Check slab soundness, drainage, cracks, coatings, and contamination. Mechanically prepare as required. Correct slope or plane with an approved exterior product. [10]

02 / BOND THE MAT

Install the exterior-rated anti-fracture mat with its approved slab-bonding material. Resolve seams, edges, drains, and any required waterproofing beneath or within the assembly. [03]

03 / SET WITH 255 MULTIMAX

Use the specified 255 MULTIMAX setting mortar within its product limits and the accepted assembly. Back-butter and verify at least 95% contact, with corners and edges supported. [02, 11]

04 / SPACE THE FIELD

Set ordinary tile joints with 3/16 in spacers. Check the actual tile calibration and layout. Designed movement joints remain separate and are not limited to 3/16 in.

05 / GROUT AND SEAL

Finish ordinary joints with SPECTRALOCK PRO Premium. Use LATASIL at the designed movement joints and changes of plane. Follow cure, cleaning, and primer requirements. [04, 05]

06 / PROTECT AND RECORD

Protect fresh work from freezing, rain, and early traffic. Retain product lots, inspection records, written assembly acceptance, and care instructions.

EXTERIOR SYSTEM ACCEPTANCE


The mat, 255 MULTIMAX, grout, and bonding materials must be accepted as one assembly for the project. Roof decks and occupied-space conditions need their own designed roofing and waterproofing detail.

SPECTRALOCK field grout and LATASIL movement joints complement the water-management detail; neither replaces a required waterproofing system.

ELEVATION
OUTDOOR TILE

The quiet detail that protects the whole.

A restrained joint palette can be beautiful. A rigid, uninterrupted tile field can be costly.

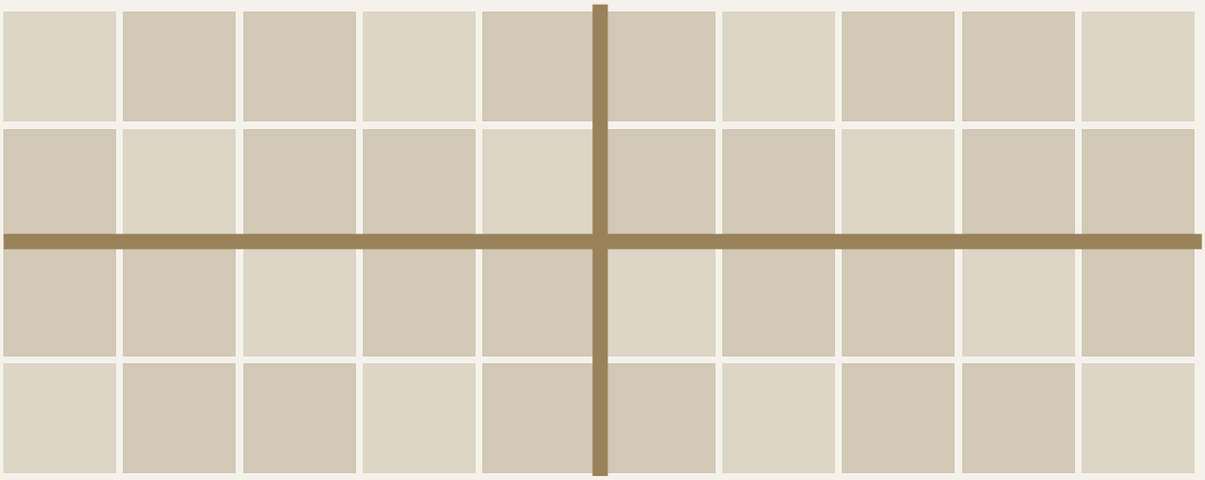

ILLUSTRATIVE MOVEMENT-JOINT PLAN / NOT A SPACING DESIGN

DESIGN THE GRID

LATICRETE exterior guidance references TCNA EJ171 and movement joints every 8-12 ft in each direction. The project designer sets final spacing and joint width for the exposure.

KEEP MOVING JOINTS FLEXIBLE

Carry required substrate joints through the finish. Provide perimeter and change-of-plane movement details. Use the specified sealant or movement profile.

DO NOT BRIDGE MOVEMENT

Rigid mortar and epoxy grout must not bridge expansion joints. Crack isolation has limits; vertical displacement and structural cracks need separate evaluation.

TREAT WATER AS A SYSTEM

Grout, sealant, waterproofing, edge flashing, and drains must work together. Inspect joints over time and repair failures before water reaches vulnerable layers.

Use current TCNA EJ171 and manufacturer details. The generic diagram shows joint locations conceptually; it is not a construction layout or a universal joint-width specification. [02-06]

Design for the conditions.

The best-looking terrace is the one that stays beautifully resolved through seasons of use.

POSITIVE FALL

Design fall away from buildings and to drains. A common bonded-terrace starting point is 1/4 in per ft; the selected system and accessibility constraints govern the final slope.

CONTINUOUS SUPPORT

Specify at least 95% mortar contact for exterior bonded tile, with supported edges and corners. Lift units to verify contact; back-butter and comb mortar in one direction. Avoid spot bonding. [11]

FREEZE-THAW CONTROL

Remove trapped-water conditions. Detail snowmelt, outlets, adjacent planting beds, and transitions so the base and slab do not become reservoirs.

WEATHER PROTECTION


Colorado sun, wind, and overnight frost change working conditions quickly. Follow each product's substrate temperature and cure limits, not just the daytime forecast.

SOIL AND EDGE STABILITY

Review expansive soil, settlement, frost exposure, drainage, and edge restraint. A porcelain finish cannot correct an unstable foundation.

SNOW, SALTS, AND TRACTION

Confirm deicer and maintenance compatibility. Texture helps traction but does not make a surface slip-proof, especially with ice, algae, or wet contaminants.

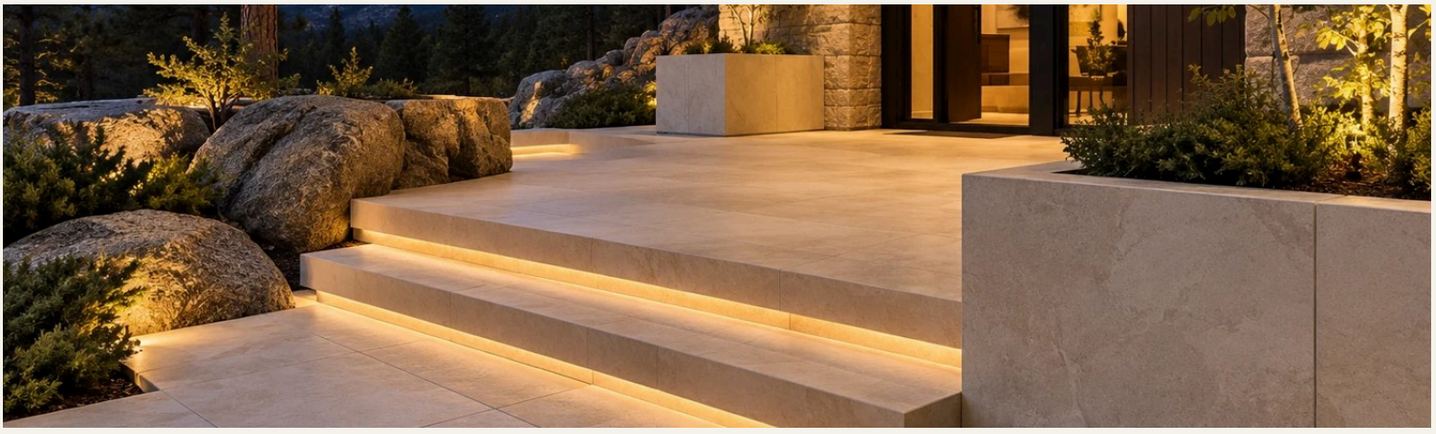

Lightweight. Deliberately specified.

Elevation promotes nominal 3 lb/ft3 EPS for its engineered foam-supported paving options.

Specify the material

State nominal 3 lb/ft3 density, exact product, certified ASTM grade, supplied thickness and board/block dimensions. Require the manufacturer data sheet and compressive-resistance values for the selected grade.

Design the support

Distribute loads through a designed support layer above the foam. Check sustained loading, creep, furniture feet, snow, construction traffic and edges. Do not place porcelain or generic thin-set directly onto bare EPS.

Resolve the water paths

Provide drainage above and below the EPS wherever the foam interrupts vertical flow. Coordinate slope, collector outlets, groundwater, buoyancy, foam joints and perimeter restraint. Protect EPS from incompatible solvents.

Submit the complete assembly

The design professional sets the layer thicknesses and allowable loading. Submit the foam certificate, support design, setting-bed compatibility, water-management details and written system acceptance together.

3 lb is density in pounds per cubic foot, not a load rating. It does not establish a universal ASTM grade or an allowable long-term bearing pressure.

Technical reference: Insulfoam Geofoam overview and selected-product certificate.

Details worth keeping.

Use current North American product instructions and the written assembly submittal for the project. Sources reviewed October 22, 2026.

01 / ELEVATION OUTDOOR TILE

Collections, formats, specialty pieces, and design imagery

OPEN SOURCE DOCUMENT

02 / LATICRETE DS-255

255 MULTIMAX mortar; confirm current SKU and complete exterior assembly

OPEN SOURCE DOCUMENT

03 / EXTERIOR MEMBRANE / MAT REVIEW

STRATA_MAT DS-26 and exterior details; verify selected mat and waterproofing

OPEN SOURCE DOCUMENT

04 / LATICRETE DS-681

SPECTRALOCK PRO Premium epoxy grout; waterproofing limitations

OPEN SOURCE DOCUMENT

05 / LATICRETE LATASIL

Exterior silicone movement-joint sealant

OPEN SOURCE DOCUMENT

06 / LATICRETE EXTERIOR INSTALLATION GUIDANCE

Water management and TCNA EJ171 movement-joint planning

OPEN SOURCE DOCUMENT

07 / PHNA / GFTK NORTH AMERICA

vdw 480 Trass bed, vdw 495 adhesion elutriant, regional instructions

OPEN SOURCE DOCUMENT

08 / GFTK TECHNICAL LIBRARY

Current product literature; reconcile regional versions before use

OPEN SOURCE DOCUMENT

09 / INSULFOAM GEOFOAM TECHNICAL DATA

EPS grade, compressive resistance, and material specification

OPEN SOURCE DOCUMENT

10 / LATICRETE 3701 FORTIFIED MORTAR BED

Exterior mortar-bed product and substrate correction resources

OPEN SOURCE DOCUMENT

The final field checks.

Use these resources with the numbered references on the preceding resource page.

11 / Mortar coverage

LATICRETE TDS 196 - verify exterior mortar contact and supported edges/corners. Lift tiles during setting to confirm the achieved contact.

LATICRETE technical support / TDS 196

12 / EPS density and grade

Foam-Control Geofoam: Understanding ASTM Standards for Geofoam. Density, compressive resistance and insulation type are separate specification fields; obtain the certificate for the material supplied.

Manufacturer reference / ASTM geofoam cross-reference

Release the terrace

Approve the tile lot and face range, confirm the pattern module, inspect substrate and drainage, record installed products, and protect the work through cure. Keep the approved assembly with the project closeout documents.

These details support product and system selection. They are not a stamped construction design or blanket Colorado approval. Use current manufacturer instructions and project-specific engineering.

From selection to specification.

Record before release

Collection and color / Exact SKU / Nominal and calibrated size / Thickness and finish / Intended exposure / Laying pattern and offset / Field joint / Movement joints / Coping and trim / Approved substrate assembly / Production lot and face range / Sample approval.

Mortar-set coordination

The Elevation catalog details 255 MULTIMAX mortar, a specified exterior-rated bonded anti-fracture mat and prepared concrete slab. Use 3/16 in field spacers with SPECTRALOCK PRO Premium grout; retain LATASIL at designed movement joints. Grout alone does not waterproof an assembly. Confirm the exact membrane, waterproofing and manufacturer detail for the project.

GFTK systems

GFTK vdw 480 Trass bedding and vdw 495 adhesion elutriant are Elevation’s preferred bedding-system pairing. Confirm current product instructions and the complete project assembly. EPS and open-graded support systems require project-specific design.

Image and range notes

Color chips are published product imagery carried in the Elevation website product library. Kronos range boards and Atlas surface studies are original manufacturer references, attributed on their pages. Source materials may show different formats and batch ranges. This specification book contains no generated product face variants.

Project support

elevation-tile.com

Collection information follows the website data verified October 9, 2026, with current manufacturer publications reviewed for face studies. Dimensions, stock and production ranges must be confirmed at order.